



product catalog

FLEXCO[®]
innovative design. flooring performance.

flexcofloors.com

table of contents

- 3 partners in performance
- 4 coordinated flooring systems
- 4 flexone pricing
- 5 categories + markets
- 6 life cycle benefits

rubber flooring

- 10 flextones® textured rubber tile
- 12 evolving styles® creative elements
- 14 evolving styles® wood elements
- 16 spextones™ rubber tile
- 18 freeflex™ rubber tile
- 20 tuflex® force® recycled rubber tile
- 22 prime sports™ rubber tile
- 24 flextuft® recycled rubber tile
- 26 repe™ oil and grease resistant
- 28 rubber flooring **SPECS**
- 30 sports flooring/multipurpose **SPECS**

vinyl flooring

- 34 natural elements premium luxury vinyl tile wood
- 36 natural elements premium luxury vinyl tile stone
- 38 delane® solid vinyl tile
- 40 geodesy™ solid vinyl tile
- 48 vinyl flooring **SPECS**

esd flooring

- 44 esd static control rubber flooring
- 46 delane® esd static control vinyl flooring
- 49 esd flooring **SPECS**

stair treads

- 52 distinct designs rubber stair treads
- 54 vinyl stair treads
- 56 flexterior® metal stair treads
- 58 rubber stair treads **SPECS**
- 64 vinyl stair treads **SPECS**
- 65 flexterior® metal treads **SPECS**
- 66 stair tread accessories
- 67 inserts + strips

wall base

- 70 wallflowers® premium rubber wall base
- 72 wood elements™ wall base
- 74 base sculptures™ wall base systems
- 76 base 2000™ wall base
- 78 vinyl wall base
- 80 health design™ wall base
- 82 wall base **SPECS**
- 83 corner blocks **SPECS**
- 84 base sculptures™ + corners **SPECS**

accessories + specs

- 86 welding beads rubber + vinyl
- 88 subleveling systems
- 90 vinyl flooring accessories
- 92 adhesives for tile, tread + wall base
- 94 installation + maintenance
- 96 astm
- 98 Xpress flooring options
- 99 sample requests rubber + vinyl
- 100 affiliations + certifications

partners in performance

FLEXCO®

innovative design. flooring performance.

W

hen you work with FLEXCO®, you're working with a resilient flooring partner that has the experience, determination and dedication to bring your flooring visions to life. FLEXCO® has advanced as an industry pioneer and innovator by creating a full complement of flooring products that cover all the bases, from tile and tread to wall base and accessories.

coordinated

F L O O R I N G S Y S T E M S


With performance-driven flooring products across all product lines, FLEXCO® is taking flooring quality, selection and service to even higher levels. From tile and sheet to treads, wall base and accessories, our products work together in color, performance and style to deliver cohesive design, installation and maintenance.



rubber flooring + vinyl flooring



stair treads



wall base + accessories



flexone pricing

FlexOne pricing from FLEXCO® affords you an easier way to choose product. With our FlexOne pricing structure, you pay the same price for any color within the same color palette in that product line. This allows you to focus on developing floor designs that achieve your desired environment or function without worrying about price differentiation.

Just imagine a confetti of colors for a cafeteria floor or bold lines for wayfinding in a healthcare facility. Create custom flooring designs for hotel ballrooms and conference centers or install a serene expanse of solid color from wall to wall. FlexOne pricing makes it easy for you to achieve all of your design objectives.

categories

+ MARKETS

healthcare

Whether it's the rush traffic of a trauma center or the soothing environment of a nursing home, FLEXCO® rubber and vinyl flooring handles the high traffic while delivering styles that contribute to a caring atmosphere. Specialized wall base and slip-resistant treads keep facilities clean and safe for patients and medical staff.



retail

Advances in today's vinyl materials make products like Natural Elements Premium LVT a natural fit for busy retail environments that want to upgrade their style and performance.



education

It's a lesson in design, durability and daily resilience. From inspiring learning experiences in today's modern classrooms to taking on class changes in the hallways, FLEXCO® rubber and vinyl flooring adds visual interest while making maintenance a breeze.



hospitality

Go with a look of stone or wood, or create exciting splashes of color with custom patterns and designs. FLEXCO® products give you complete flexibility to make your flooring an integral part of your atmosphere.

Coordinating rubber and vinyl stair treads, custom logos and custom colors are available to complement any environment.



sports

With FLEXCO®'s sports and multipurpose flooring, style is just one of our strengths. Choose from various recycled rubber products that are ready for a daily workout, while lending unique colors and versatility for weight rooms, tracks, entryways and other applications that need to stand tough.




life cycle

B E N E F I T S

RUBBER + VINYL FLOORING SYSTEMS

In highly used, highly abused environments like the healthcare sector, the “cheapest” flooring products can be the most expensive choice over the lifetime of the floor. More expensive floors – like rubber – can actually be the cheapest at a little over half the cost of the next closest option over the lifetime of the floor. Even at five years, payback for some of the more expensive floors had disqualified the cheaper floors. Theoretically, in a large hospital over 15 years’ time, millions of dollars could be saved by installing floors that do not require finishing. Rubber seems to be the best product overall. It doesn’t move over years, decay or wear like most other products.


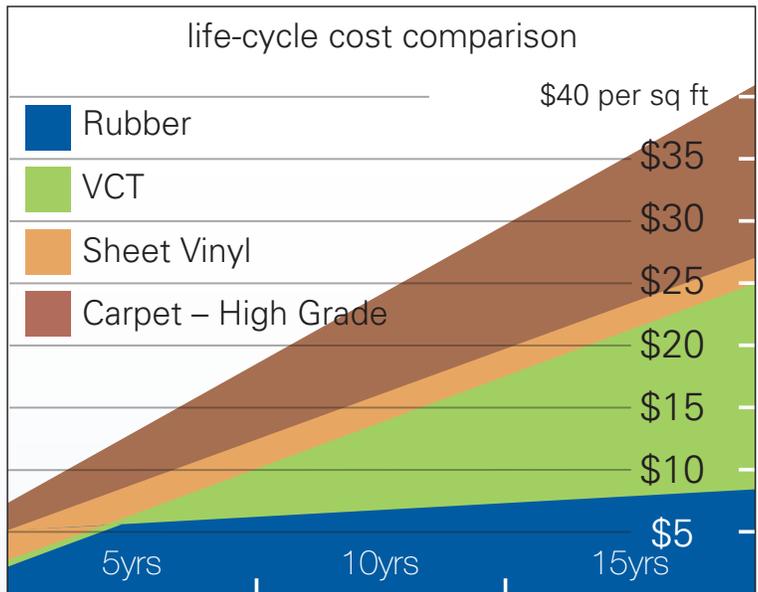


life-cycle methodology includes the cost cleaned:

product	material cost per sq. ft	cleaning cost per 1,000 sq. ft over 15 yrs.	
VCT	\$1.20 - \$1.50 SF	\$24,313	17x*
Sh Vinyl	\$2.47 - \$5.00 SF	\$25,879	8x*
NF Sh Vinyl	\$4.00 - \$5.00 SF	\$15,640	4x*
Rubber	\$4.00 - \$5.50 SF	\$ 8,095	2x*
Carpet	\$6.67 - \$25.50 SF	\$21,982	9x*

*denotes the number of times the original cost of the floor.

Source: How to Make Business Decisions for Facility Flooring Suzanne R. Barnes, AIA, CFM

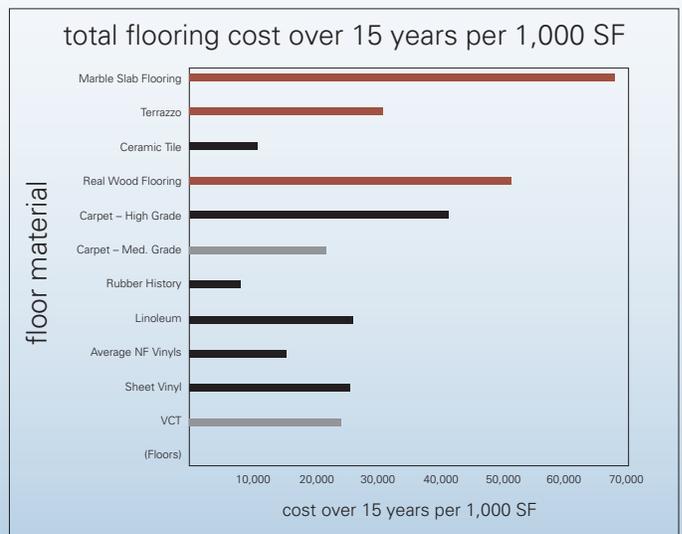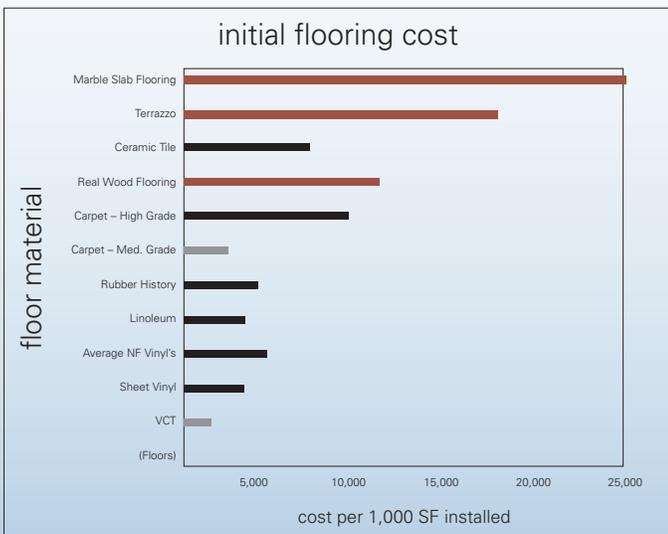

FLEXCO®

DISTINCT DESIGNS

rubber flooring

TILE + SHEET

N

aturally resistant to mold and mildew, FLEXCO® rubber floors are designed for durability, versatility and slip resistance, plus they're very quiet and comfortable underfoot. Choose from textured, smooth and environmentally-friendly tile, in colors and patterns to match any design or application, from showrooms and residences to auto shops and bakeries.



FLEXCO®
innovative design. flooring performance.

rubber flooring
color palettes

flextones®



evolving styles®



spextones™



sports + multipurpose
flooring

tuflex® force®



prime sports™



flextuft®



flextones®

T E X T U R E D R U B B E R T I L E

FLEXCO®

5
TOP

- 1 PVC-free rubber tiles**
- 2 Homogeneous color**
- 3 Reduces leg fatigue and noise**
- 4 FlexOne pricing – solid colors all one price**
- 5 Natural resistance to bacteria and fungi in accordance with ASTM G21**

 EnviroFlex™ product. May contribute to one or more LEED® credits.



Made in the U.S.A.

N

ow featuring 57 colors, FlexTones® coordinate across tile, tread, wall base and accessories for consistent color and flexible design. The raised and textured patterns allow dirt and water to drain off of the walking surface, increasing traction and improving slip resistance. Our low profile versions are ideal for areas with small-wheeled vehicular traffic, such as retail stores, healthcare facilities, airport terminals and more.

expanded palette

flextones®
COLORS



EVOLVING STYLES®

creative elements

RUBBER TILE + SHEET



- 1 PVC-free rubber tile and sheet**
- 2 Natural resistance to bacteria and fungi in accordance with ASTM G21**
- 3 Homogeneous color**
- 4 Quiet and extremely comfortable walking surface**
- 5 Low maintenance, no waxing required**

 EnviroFlex™ product. May contribute to one or more LEED® credits.



T

he Evolving Styles® Creative Elements collection offers so much selection. Choose from two gauges, various tile sizes and sheet rubber flooring. You also have the option of using FLEXCO® Rubber Welding Beads to create a seamless installation for clean rooms and areas that have strict requirements for added hygiene.




evolving styles[®]
 creative elements
 C O L O R S



White w/Black
 CE-100



French Gray
 w/Black
 CE-103




Black w/White
 CE-109



Beige w/White
 & Brown
 CE-119



Beige w/Brown
 CE-123



Light Gray
 CE-125



Blue
 CE-131



White w/Blue
 CE-132



Delft Pansy
 CE-135



Charcoal
 w/Black
 CE-143



Sage
 CE-150



White w/Sage
 CE-151



Vintage Plum
 CE-160



Mediterranean
 Green
 CE-163



Honey
 CE-164



Red w/White
 CE-166

Complete specs on pages 28-29.

EVOLVING STYLES®

wood elements

RUBBER TILE + SHEET



- 1 PVC-free rubber tile and sheet**
- 2 Natural resistance to bacteria and fungi in accordance with ASTM G21**
- 3 Homogeneous color**
- 4 Quiet and extremely comfortable walking surface**
- 5 Low maintenance, no waxing required**

 EnviroFlex™ product. May contribute to one or more LEED® credits.



Made in the U.S.A.

T

he Evolving Styles® Wood Elements collection combines a unique wood aesthetic with the durability and comfort of rubber. The two gauges, various tile sizes and sheet rubber flooring options open up your opportunities for gymnasiums, all-purpose rooms and other active facilities. FLEXCO® Rubber Welding Beads create a seamless installation for areas that have strict requirements for added hygiene.



FLEXCO[®]
innovative design. flooring performance.

evolving styles[®]
wood elements
C O L O R S



Simply Cherry
WE-104



Vintage Pecan
WE-105



Amber Maple
WE-106



Classic Oak
WE-107

Complete specs on pages 28-29.

spextones™

RUBBER TILE



- 1 PVC-free rubber tile
- 2 Natural resistance to bacteria and fungi in accordance with ASTM G21
- 3 Colors coordinate with FlexTones®
- 4 Conceals dirt and subsurface irregularities
- 5 Exceeds ADA recommendations for slip resistance

 EnviroFlex™ product. May contribute to one or more LEED® credits.




FLEXCO®'s SpexTones™ product line is highlighted by speckled coloration that works well for high-traffic areas prone to everyday dirt and scuffing. It's everything you need to specify your next project with more confidence and in less time.




FLEXCO[®]

innovative design. flooring performance.


spextones[™]
C O L O R S



Black Dahlia
w/ Medium
Gray, Fjord
01



Charcoal w/
Black Dahlia,
Doe
03



Autumn w/
Ginger,
Burlwood,
Corn Silk
08



Medium Gray
w/Graphite,
Seashell
014




Neutrail w/
Seashell,
Spring Leaf
020




Light Gray w/
Delft Pansy,
Medium Gray
025



Arctic
w/Nickel,
Titanium, Linen
029



Doe w/Milk
Chocolate,
Beige
033



Delft Pansy w/
Winsor, Doe
035




Dark Beige
w/Seashell,
Fjord
037



Vizcaya Palm
w/Polo Green,
Cappuccino
047




Berry w/ Black
Dahlia,
Medium Gray
048



Winsor w/
Delft Pansy,
Fjord
049




Polo Green w/
Vizcaya Palm,
Milk Chocolate
052




Milk Chocolate
w/Bark, Doe
056



Blue Shadow
w/Delft Pansy,
Doe
058




Plum Pudding w/
Delft Pansy,
Medium Gray
059



Seashell w/
Medium Gray,
Nickel
074



Nickel w/
Graphite,
Linen
090



Wheat w/
Autumn,
Corn Silk
098



Twilight Blue
w/Arctic,
Neutrail
301



Spring Leaf w/
Arctic,
Neutrail
302

freeflex™

RUBBER TILE

FLEXCO
5
TOP

- 1 PVC-free rubber tile**
- 2 Sizes offer limitless creative possibilities**
- 3 Natural resistance to bacteria and fungi in accordance with ASTM G21**
- 4 Exceeds ADA recommendations for slip resistance**
- 5 Quiet and extremely comfortable walking surface**

 EnviroFlex™ product. May contribute to one or more LEED® credits.



Imagine a world where you're free to create, a place where your ideas are unrestricted. The FreeFlex™ collection offers rubber tile sizes that coordinate well with other flooring materials, such as carpet tile and LVT, while affording the extreme durability and resilience of rubber. The creative possibilities are endless.



FLEXCO[®]

innovative design. flooring performance.

freeflex[™]
SIZES & COLORS

Available Sizes:
6" x 36"
12" x 36"
18" x 36"

FreeFlex[™] is available in the following rubber tile and stair tread color palettes.

flextones[®]
COLORS



See page 11
for all 57 colors
available

EVOLVING STYLES[®]
creative elements
COLORS



See page 13
for all 16 colors
available

EVOLVING STYLES[®]
wood elements
COLORS



See page 15
for all 4 colors
available

spextones[™]
COLORS



See page 17
for all 22 colors
available

FlexTones[®] palette available in Hammered profile.

Creative Elements, Wood Elements and SpexTones[™] available in Hammered or Smooth profiles.

Complete specs on page 29.

tuflex® force®

RECYCLED RUBBER TILE

FLEXCO®

5
TOP

- 1 27" x 27" recycled rubber tile in 3/8" gauge
- 2 Square or interlocking edges
- 3 77% non-automotive post-industrial recycled content
- 4 Resilient anti-fatigue surface
- 5 Exceeds OSHA and ADA standards for excellent traction and durability



EnviroFlex™ product. May contribute to one or more LEED® credits.




M


ake style and endurance an everyday practice. With its patented vulcanization process using predominantly recycled rubber, Tuflex® Force® Resilient Rubber Flooring tiles have been keeping sports and commercial facilities in peak condition since 1957.



tuflex® force®
COLORS




Black Dahlia
w/ Medium
Gray, Fjord
01



Charcoal w/
Black Dahlia,
Doe
03




Light Gray w/
Delft Pansy,
Medium Gray
025




Doe w/ Milk
Chocolate,
Beige
033




Delft Pansy w/
Winsor, Doe
035



Vizcaya Palm
w/ Polo Green,
Cappuccino
047




Berry w/ Black
Dahlia,
Medium Gray
048



Winsor w/
Delft Pansy,
Fjord
049



Polo Green w/
Vizcaya Palm,
Milk Chocolate
052



Milk Chocolate
w/ Bark, Doe
056



Blue Shadow
w/ Delft Pansy,
Doe
058



Plum Pudding w/
Delft Pansy,
Medium Gray
059



Onyx
111

prime sports™

RUBBER TILE

FLEXCO®

5
TOP

- 1 Available in rolls, square edge tiles and interlocking tiles; custom roll options available
- 2 Four gauge options
- 3 Outstanding sound and shock absorption
- 4 Indoor/outdoor
- 5 Standard 10% chip content, or special order up to 90% chip content with one or multiple colors



EnviroFlex™ product. May contribute to one or more LEED® credits.

Highly functional. Highly affordable. Prime Sports™ Flooring is a rubber recreational flooring that is well-conditioned to take on a rigorous workout or provide added walking comfort and slip-resistance. Designed for commercial, industrial and fitness applications, Prime Sports™ Flooring is recommended for play areas, golf shops, fitness centers, daycares, ramps, locker rooms, cardio areas, ice arenas and retail flooring.




FLEXCO[®]
innovative design. flooring performance.


prime sports™
COLORS




Black Dahlia
PSF-001




Evergreen
PSF-200




Ruby Red
PSF-201




Dove
PSF-202




Vanilla
PSF-203



Starlight
PSF-204



Blue Ice
PSF-205



Daffodil
PSF-206

flextuft®


R E C Y C L E D R U B B E R T I L E



- 1 Modular tile units allow for diverse patterns**
- 2 Vulcanized and non-vulcanized backing**
- 3 Easy maintenance**
- 4 Indoor/outdoor**
- 5 90% recycled content**

 EnviroFlex™ product. May contribute to one or more LEED® credits.



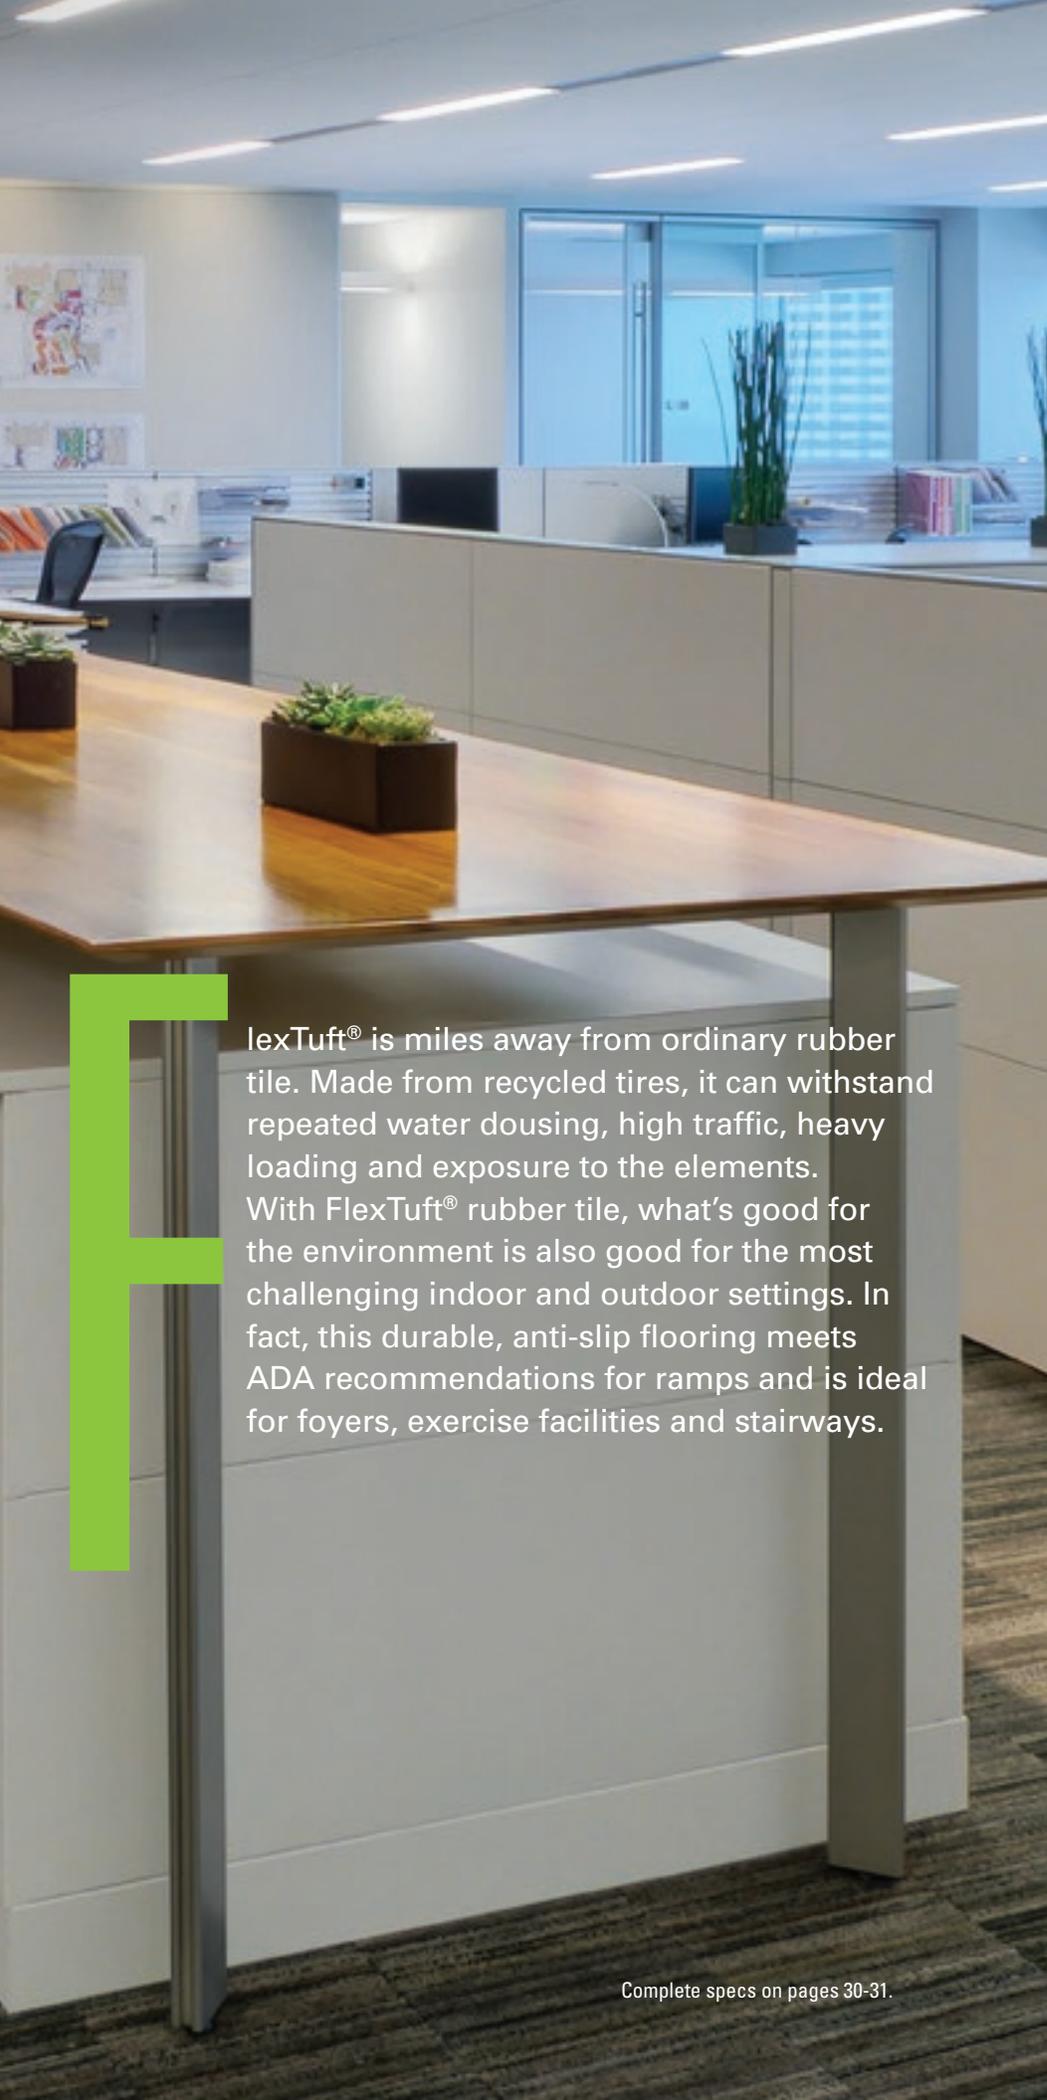

FLEXCO[®]

innovative design. flooring performance.

flextuft[®]
C O L O R S



Tweed
FT-1



Delft & Gray
FT-3



Cranberry & Gray
FT-4



Spruce & Gray
FT-5

R
U
B
B
E
R

F
L
O
O
R
I
N
G

FlexTuft[®] is miles away from ordinary rubber tile. Made from recycled tires, it can withstand repeated water dousing, high traffic, heavy loading and exposure to the elements. With FlexTuft[®] rubber tile, what's good for the environment is also good for the most challenging indoor and outdoor settings. In fact, this durable, anti-slip flooring meets ADA recommendations for ramps and is ideal for foyers, exercise facilities and stairways.

Complete specs on pages 30-31.

repel™

OIL & GREASE RESISTANT
RUBBER FLOORING



- 1 Part of the actual rubber formulation, not a surface treatment that will wear off**
- 2 Oil and grease resistant**
- 3 Does not become blistered and marred like many other rubber products**
- 4 Quiet, comfortable underfoot**
- 5 Slip resistant**

 EnviroFlex™ product. May contribute to one or more LEED® credits.



Some floors need to work a lot harder than others. For instance, in commercial kitchens, automotive centers and machine shops, the presence of oil and grease can cause special challenges. That's where you need FLEXCO®'s Repel™ rubber flooring.

Repel is available in all rubber tile and stair tread colors, excluding sheet rubber. Repel must be specified at time of order. Do not use around hot grease areas.



FLEXCO®

innovative design. flooring performance.

repel™

COLORS

order prefix: **R**

Repel is available in all rubber tile and stair tread colors, excluding sheet rubber.

updated
flextones palette

flextones®

COLORS



See page 11
for all 57 colors
available

EVOLVING STYLES®
creative elements

COLORS



See page 13
for all 16 colors
available

EVOLVING STYLES®
wood elements

COLORS



See page 15
for all 4 colors
available


spextones™

COLORS






See page 17
for all 22 colors
available


For flextones®, creative elements™, wood elements™ + spextones™ color palettes

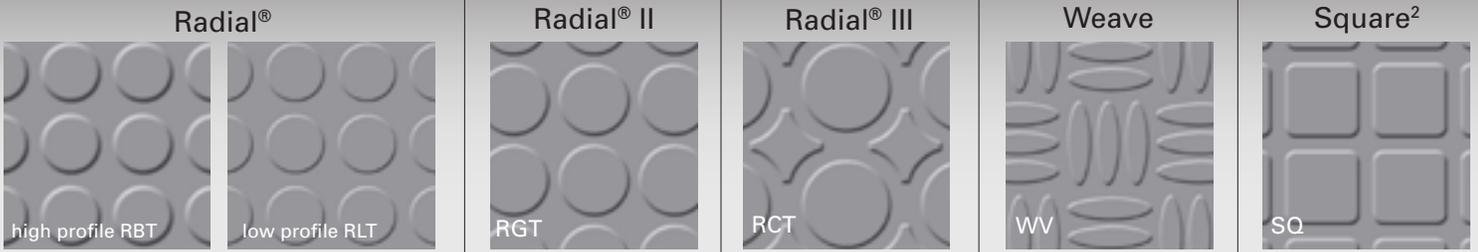


	Radial® (RBT/RLT)	Radial® II (RGT)	Radial® III (RCT)	Weave (WV)	Square² (SQ)
GAUGE	1/8"	1/8"	1/8"	1/8"	1/8"
SIZE	18" x 18"	18" x 18"	18" x 18"	18" x 18"	18" x 18"
PIECES /CTN	20	20	20	20	20
WEIGHT /CTN (LB)	46	46	46	46	46
SQ. FT /CTN	45	45	45	45	45



Hammered



Smooth



(Smooth is available in creative elements™, wood elements™ + spextones™ colors only. Smooth rolls are not available in spextones™.)

Hammered (SE)

GAUGE	.080"	1/8"	1/8"	1/8"
SIZE	24" x 24"	12" x 12"	18" x 18"	36" x 36"
PIECES /CTN	20	45	20	6
WEIGHT /CTN (LB)	60	46	46	62
SQ FT /CTN	80	45	45	54

1/8" Smooth †

1/8"	1/8"	1/8"	1/8"	1/8"	1/8"
12" x 12"	18" x 18"	36" x 36"	6" x 36"	12" x 36"	18" x 36"
45	20	6	18	10	6
52	52	62	31.05	34.50	31.05
45	45	54	27	30	27

Hammered (SE)

GAUGE	1/8"	1/8"	1/8"
SIZE	6" x 36"	12" x 36"	18" x 36"
PIECES /CTN	18	10	6
WEIGHT /CTN (LB)	31.05	34.50	31.05
SQ FT /CTN	27	30	27

Smooth Rolls

1/8" Smooth Rolls		.100" Smooth Rolls
36" x 25' (8 Sq Yds/Roll; 10.8 Lbs./Sq Yd)	48" x 25' (11 Sq Yds/Roll; 10.8 Lbs./Sq Yd)	36" x 25' (8 Sq Yds/Roll; 8.5 Lbs./Sq Yd)
		48" x 25' (11 Sq Yds/Roll; 8.5 Lbs./Sq Yd)



Hammered (SE)



Smooth (SM)



Hammered (SE)



Smooth (SM)

* Special orders for lengths greater than 25'.
 † Sheet rubber manufactured untrimmed must be double-cut on the job site.
 ** IMO and Repel formulation not available in sheet.
 Note: Add HW to color number for pre-grooved Heat Weld tiles available in 36" x 36" x 1/8" gauge.



Rubber Flooring Recommended Adhesives
 SP-500 Acrylic Aerosol Pressure-Sensitive Adhesive
 AW-510 Acrylic Wet-Set Adhesive
 AP-520 Acrylic Roll-On Pressure-Sensitive Adhesive
 MS-700 Modified Silane Wet-Set Adhesive
 EW-710 Epoxy Wet-Set Adhesive


sports + multipurpose flooring



tuflex[®] force[®] order prefix: **TF**

GAUGE	3/8"
SIZE	Square: 27" x 27" (5.0625 Sq/Ft per tile) Interlocking Tiles: 25-3/4" x 25-3/4" (4.6046 Sq/Ft per tile)
PACKAGING	Maximum 100 tiles per pallet
WEIGHT	11.7 lbs per piece

Square Edge Tile or Interlocking Tile

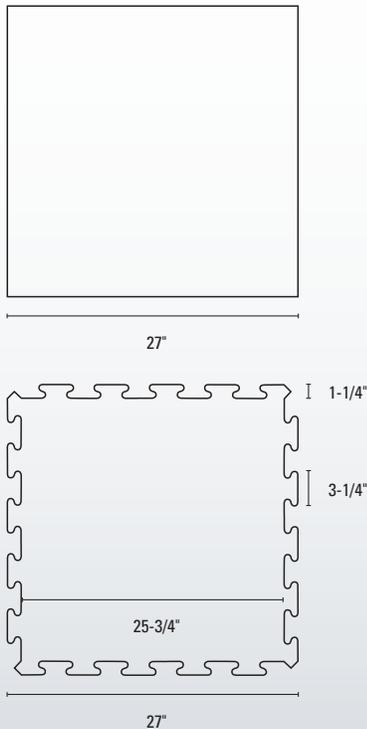


prime sports[™] order prefix: **PSF**

GAUGE	5/32", 1/4", 3/8", 1/2"
SIZE	Rolls: 48" x 49.5' (22 Sq/Yds, 198 Sq/Ft) Square Edge Tiles: 36" x 36" (9 Sq/Ft per piece) Interlocking Tiles: 34-1/4" x 34-1/4" (8.2 Sq/Ft per piece)
PACKAGING	Unboxed tiles and rolls shrink wrapped and put on pallet

Material may contain skiving marks from the manufacturing process; FLEXCO[®] does not consider these defects unless they are excessive in nature. Installation of material containing these skive marks is considered acceptance of the material and therefore waiving the right of replacement except under special circumstances determined by FLEXCO[®].

Square Edge Tile, Rolls or Interlocking Tile

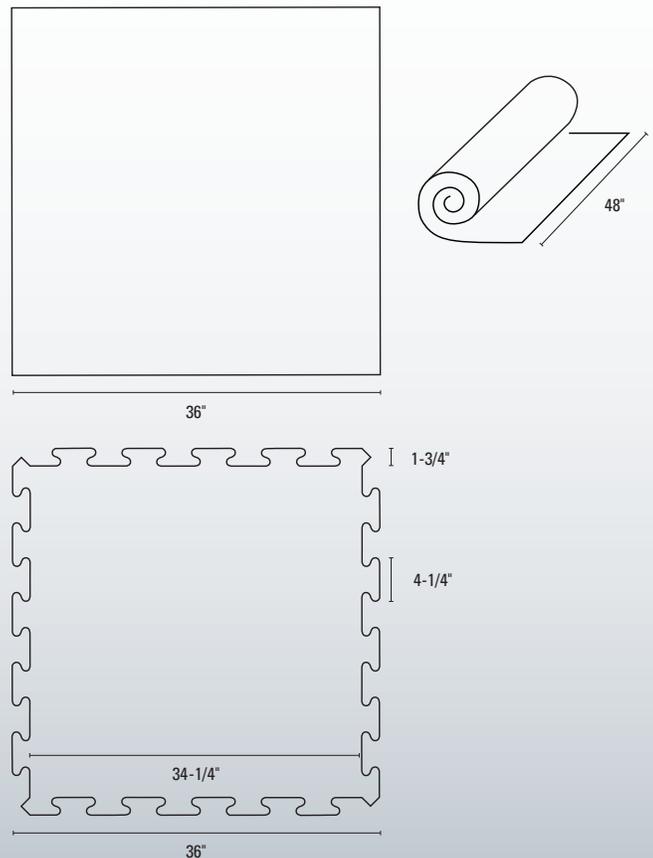



flextuft® order prefix: **FT**

SIZE	12" x 12"
VULCANIZED GAUGE	3/8" nominal
NON-VULCANIZED GAUGE	3/8" nominal
PIECES /CTN	25
WEIGHT /CTN (LB)	
VULCANIZED	50
NON-VULCANIZED	52
SQ FT /CTN	25

Note: Add V or NV to the product number for vulcanized or non-vulcanized tile (e.g., FTNV-1 for FlexTuft® Tweed Non-Vulcanized tile).

Non-Vulcanized FlexTuft® tile uses a glued polyester backing. Vulcanized FlexTuft® tile features rubber strips sewn into the backing.

For outdoor use, always use Vulcanized FlexTuft®.

While various environmental conditions may alter the appearance of recycled raw materials used in FlexTuft® flooring, the effects are not necessarily undesirable. When exposed to direct sunlight and other elements, fading will occur.



Sports Flooring Recommended Adhesives
MS-700 Modified Silane Wet-Set Adhesive
EW-710 Epoxy Wet-Set Adhesive



FLEXCO® products are easy to maintain using new Excelsior™ Maintenance Products. Visit flexcofloors.com for available options for cleaning and finishing.

[®]**FLEXCO**

vinyl flooring

TILE + PLANK





FLEXCO[®]
innovative design. flooring performance.

V I N Y L
F L O O R I N G

natural elements wood



natural elements stone



delane[®] solid vinyl tile



geodesy[™] solid vinyl tile



From retail shops to restaurants to emergency rooms, FLEXCO[®] vinyl flooring is performance and style through and through.

With no waxing required, it's a solid solution whether your needs are anti-bacterial or all about design. Tough on heavy traffic. Easy to maintain. Our vinyl flooring will stand the tests of time in more ways than one.

NATURAL ELEMENTS

premium luxury vinyl tile wood



- 1 1/8" gauge, 4" x 36" or 6" x 48" vinyl plank**
- 2 Urethane ceramic bead finish reduces potential for scratches and no waxing required; 28 mil wear layer exceeds ASTM F1700 for wear layer**
- 3 100% pure virgin material**
- 4 Resists bacteria growth**
- 5 Over 50% of raw materials are sourced within a 100 mile radius of the manufacturing facility**



EnviroFlex™ product. May contribute to one or more LEED® credits.



Made in the
U.S.A.

B

lending the beauty of natural woods with the durability and resilience of vinyl flooring, natural elements premium luxury vinyl tile uses original designs to transform rooms with the look and feel of realistic wood. As flexible to install and as easy to use as traditional vinyl tile, this commercial-grade resilient flooring provides the warm and welcoming atmosphere only wood can create.



9 new colors!

natural elements wood
4" x 36" or 6" x 48" planks



Black Sable
608

Antique Silver
609



American Cherry
610

Warm Amber Cherry
611



Sequoia Cherry
613

Walnut
615



Rustic Walnut
616

Antique Teak
618



Chestnut
619

Traditional Oak
620



Natural Oak
622

Rustic Oak
624



Blonde
636

Caramel
637



Cool Gunstock
638

Russett
639



Weathered Oak
640

Winchester
641



Timberwolf
642

Castle Gray
643



Driftwood
644

Barnwood
645



Whitewash
646

Mystique
647



Pickled Oak
648

Photo courtesy of JRA Architects, Louisville, KY
Complete specs on page 48.

NATURAL ELEMENTS

premium luxury vinyl tile stone



- 1** 1/8" gauge, 18" x 18" vinyl tile (15 colors) or 12" x 24" vinyl tile (8 new colors)
- 2** Urethane ceramic bead finish reduces potential for scratches and no waxing required; 28 mil wear layer exceeds ASTM F1700 for wear layer
- 3** 100% pure virgin material
- 4** Resists bacteria growth
- 5** Over 50% of raw materials are sourced within a 100 mile radius of the manufacturing facility



EnviroFlex™ product. May contribute to one or more LEED® credits.



Made in the
U.S.A.

W

ith its stylish elegance and polished impression, natural elements premium luxury vinyl tile combines commercial-grade resilient vinyl flooring with the timeless beauty of one of nature's most appreciated materials. Easy to install and maintain, natural elements premium luxury vinyl tile stone collection offers the look of stone with the durability and performance of resilient flooring.



New colors are 12" x 24" tiles; all other colors are 18" x 18" tiles



Complete specs on page 48.

FLEXCO[®]
innovative design. flooring performance.

8 new colors!

natural elements stone 18" x 18" tiles



natural elements stone 12" x 24" tiles



VINYL FLOORING

DELANE®
solid vinyl
TILE

FLEXCO®
5
TOP

- 1 **.080" or 1/8" gauge solid vinyl tile in various sizes**
- 2 **Easily buffs to a shine, no waxing required**
- 3 **Designed using bio-based, phthalate-free plasticizer, reducing greenhouse gas impact**
- 4 **May be seamlessly installed by heat welding**
- 5 **Flexible for quick and easy flash coving**



EnviroFlex™ product. May contribute to one or more LEED® credits.



D

elane® Solid Vinyl Tile is well-suited for healthcare, office, retail and hospitality applications where durability and easy maintenance are desired. Pre-grooved floor tiles can be fused together with Welding Beads in matching or contrasting colors to create a completely seamless “unitized” floor.



FLEXCO®

innovative design. flooring performance.

delane®
solid vinyl tile

C O L O R S



White/Gray
40



Gray/Dark
Gray 42



Ivory/Buckskin
43




Lt. Beige/Tan
47



Steel Gray
48




Warm Gray
65



Charcoal/Lt.
Gray 66



White/Blue
69



Galaxy
308



Star Struck
309



Dark Mocha
310



Golden Gate
311



Honeydew
312



Rhythm &
Blues 313



Toasted
Coconut 314



Gingerbread
315



Cosmic Latte
316



Ginger Ale
317



Amaretto
318



Tusk
319

V I N Y L
F L O O R I N G

Complete specs on page 48.

GEODESY™
solid vinyl
TILE

FLEXCO
5
TOP

- 1** .080" or 1/8" gauge solid vinyl tile in various sizes
- 2** Easily buffs to a shine, no waxing required
- 3** Designed using bio-based, phthalate-free plasticizer, reducing greenhouse gas impact
- 4** May be seamlessly installed by heat welding
- 5** Flexible for quick and easy flash coving



EnviroFlex™ product. May contribute to one or more LEED® credits.



G

Geodesy™ Solid Vinyl Tile brings the beautiful design of tone-on-tone speckled patterns with the durability of solid vinyl. Solid vinyl tile provides significantly better performance and cheaper maintenance than composition tiles.



geodesy[™]
solid vinyl tile
C O L O R S



Magnetic
400



Relativity
401



Inertia
402



Astro
403



Tides
404



Vector
405



Gravity
406



Orbit
407



Polar
408



Density
409



Navigation
410



Lunar
411



Collision
412



Wavelength
413

FLEXCO[®]

esd flooring

RUBBER + VINYL

esd rubber



delane[®] esd vinyl



With low-maintenance rubber tile options, FLEXCO[®] ESD static control flooring offers several options for safety and style. From clean rooms to healthcare environments to data centers, it's an easy-to-monitor solution that eliminates unwanted charges in more ways than one.

esd rubber

STATIC CONTROL RUBBER FLOORING



- 1 .080" gauge in 24" x 24" homogeneous rubber tile
- 2 10-year conductivity warranty
- 3 Low maintenance, no waxing required
- 4 May be seamlessly installed by heat welding
- 5 Naturally resists bacteria and fungi in accordance with ASTM G21

 EnviroFlex™ product. May contribute to one or more LEED® credits.




Made in the
U.S.A.

From data centers to clean rooms to healthcare facilities, damage to sensitive equipment from electrostatic discharge can cost time and money while disrupting critical daily operations. With ESD static dissipative rubber tile, FLEXCO® brings an expanded color palette plus easy maintenance to facilities looking for superior style and safety in their controlled environments.



esd rubber
C O L O R S




Black Dahlia w/
Medium Gray,
Fjord
01



Medium Gray
w/Graphite,
Seashell
014




Neutrail w/
Seashell,
Spring Leaf
020




Delft Pansy w/
Winsor, Doe
035



Dark Beige
w/Seashell,
Fjord
037



Milk Chocolate
w/Bark, Doe
056



Seashell w/
Medium Gray,
Nickel
074



Nickel w/
Graphite,
Linen
090



Twilight Blue
w/Arctic,
Neutrail
301



Spring Leaf w/
Arctic,
Neutrail
302

DELANE® esd vinyl

STATIC CONTROL VINYL FLOORING



- 1 1/8" gauge solid vinyl tile in various sizes, including 12" x 24"***
- 2 Lifetime conductivity warranty**
- 3 No waxing required to maintain static dissipative qualities**
- 4 May be seamlessly installed by heat welding**
- 5 Performs under heavy rolling loads**

*Other options available by special order.

 EnviroFlex™ product. May contribute to one or more LEED® credits.



The effects and annual losses attributed to electrostatic discharge (ESD) are estimated to run into the billions of dollars just in the electronics industry alone. To control the static charge, FLEXCO® combines conductive or dissipative vinyl tile with a specially formulated conductive adhesive. This creates a conductive pathway which allows the static to flow through the tile and along the adhesive to the ground point. That makes FLEXCO® ESD static control vinyl flooring an effective first-choice solution to control unwanted human body voltage in areas where mobility cannot be restricted by wrist straps.



delane[®] esd vinyl
 C O L O R S



White/Gray
40



Gray/Dark
Gray 42



Ivory/Buckskin
43




Lt. Beige/Tan
47



Steel Gray
48




Warm Gray
65



Charcoal/Lt.
Gray 66



White/Blue
69



Galaxy
308



Star Struck
309



Dark Mocha
310



Golden Gate
311



Honeydew
312



Rhythm &
Blues 313



Toasted
Coconut 314




Gingerbread
315



Cosmic Latte
316



Ginger Ale
317



Amaretto
318



Tusk
319

Complete specs on page 49.

natural elements wood order prefix: **NEW**



GAUGE	1/8"	1/8"
SIZE	4" x 36"	6" x 48"
PIECES /CTN	36	18
WEIGHT /CTN (LB)	36	35
SQ FT /CTN	36	36

natural elements stone order prefix: **NES**



GAUGE	1/8"	1/8"
SIZE	18" x 18"	12" x 24"
PIECES /CTN	16	18
WEIGHT /CTN (LB)	36	36
SQ FT /CTN	36	36

delane[®] solid vinyl tile order prefix: **SSV**



GAUGE	1/8"	1/8"	1/8"	1/8"	.080"	.080"	.080"	.080"
SIZE	12" x 12"	12" x 24"	24" x 24"	36" x 36"	12" x 12"	12" x 24"	24" x 24"	36" x 36"
PIECES /CTN	45	16	14	6	70	26	20	10
WEIGHT /CTN (LB)	54	36	67	65	53	37.4	61	68
SQ FT /CTN	45	32	56	54	70	52	80	90

Note: Add HW to color number for pre-grooved Heat Weld tiles (e.g., SSV-40HW) available in 24"x24" and 36" x 36" sizes in 1/8" gauge only. No upcharge.

geodesy[™] solid vinyl tile order prefix: **GE**



GAUGE	1/8"	1/8"	1/8"	1/8"	.080"	.080"	.080"	.080"
SIZE	12" x 12"	12" x 24"	24" x 24"	36" x 36"	12" x 12"	12" x 24"	24" x 24"	36" x 36"
PIECES	45	16	14	6	70	26	20	10
WEIGHT /CTN (LB)	54	36	67	65	53	37.4	61	68
SQ FT /CTN	45	32	56	54	70	52	80	90

Note: Add HW to color number for pre-grooved Heat Weld tiles (e.g., GE-400HW) available in 24"x24" and 36" x 36" sizes in 1/8" gauge only. No upcharge.



Vinyl Flooring Recommended Adhesives

- SP-500 Acrylic Aerosol Pressure-Sensitive Adhesive*
- AW-510 Acrylic Wet-Set Adhesive
- AP-520 Acrylic Roll-On Pressure-Sensitive Adhesive*
- MS-700 Modified Silane Wet-Set Adhesive
- EW-710 Epoxy Wet-Set Adhesive

**Only for Natural Elements LVT, as pressure-sensitive adhesives are not recommended for solid vinyl tile.*

esd flooring


esd rubber order prefix: **SSDR**



GAUGE	.080"
SIZE	24" x 24"
PIECES /CTN	20
WEIGHT /CTN (LB)	60
SQ. FT /CTN	80

Oversized 24" x 24" tiles are also available for access panel applications.

DELANE® esd vinyl



Static Dissipative Vinyl Tile order prefix: **DISS**



GAUGE	1/8"	1/8"	1/8"	1/8"
SIZE	12" x 12"	12" x 24"	24" x 24"	36" x 36"
PIECES /CTN	45	16	14	6
WEIGHT /CTN (LB)	54	36	67	65
SQ. FT /CTN	45	32	56	54

Conductive Vinyl Tile order prefix: **SP**

Note: Add HW to color number for pre-grooved Heat Weld tiles (e.g., SP-40HW) available in 24"x24" and 36" x 36" sizes in 1/8" gauge only. No upcharge.

Oversized 24" x 24" tiles are also available for access panel applications.

When ordering low outgassing tile (Logic) add an "L" in front of the prefix.

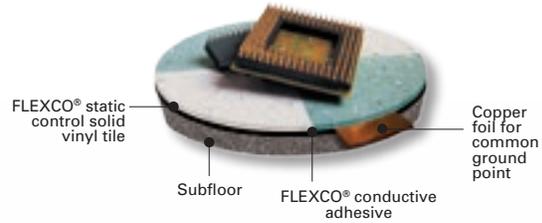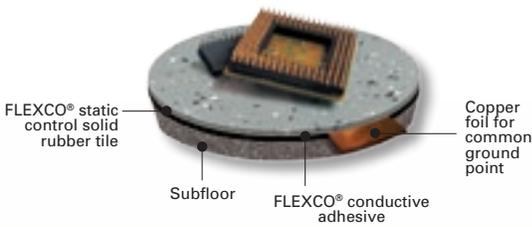

ESD Flooring Recommended Adhesives
 ASD-800 Acrylic Wet-Set ESD Adhesive
 USD-810 Urethane Wet-Set ESD Adhesive


FLEXCO®

stair treads

R U B B E R + V I N Y L


W

Whether your priority is matching tile colors or adding safety features, FLEXCO® stair treads take design and performance up a notch. Create a seamless style from floor to floor with the high-performance of rubber or meet high-traffic demands with a durable vinyl solution. FLEXCO® stair treads deliver on every level.

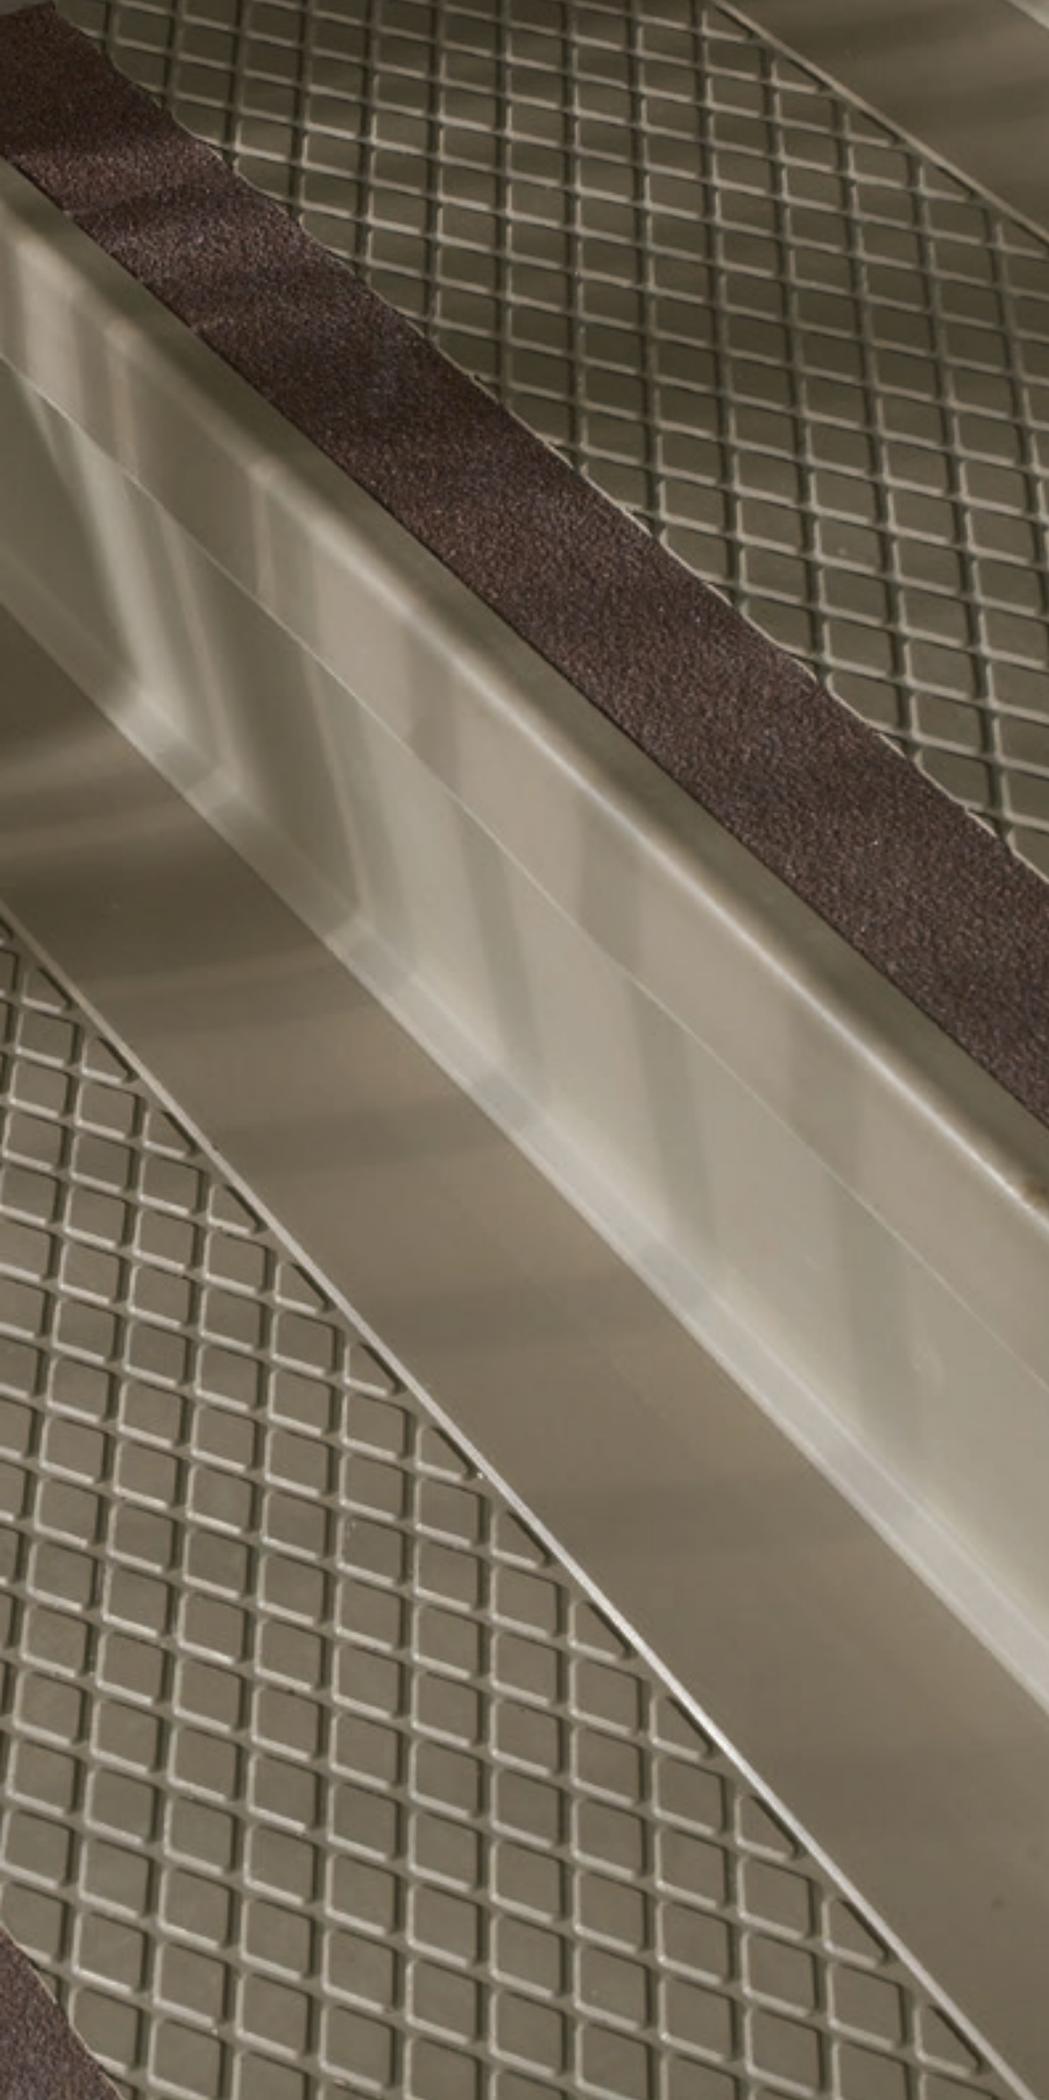

FLEXCO[®]
innovative design. flooring performance.

distinct designs
rubber treads



vinyl treads



metal treads



distinct designs

R U B B E R S T A I R T R E A D S



- 1 Type TS, PVC-free rubber treads meet ASTM F2169**
- 2 25-year warranty on metal-reinforced nose treads**
- 3 Homogeneous construction**
- 4 Natural resistance to bacteria and fungi in accordance with ASTM G21**
- 5 Ribbed inserts or grit strips available**

 EnviroFlex™ product. May contribute to one or more LEED® credits.



LEXCO® offers one of today's most extensive lines of rubber stair treads. Our system of rubber stair treads, risers, stringers and landing tiles was developed to bring style, dependability and efficiency together. So design outside the box. Choose from our Distinct Designs colors to give your project a fresh look.



innovative design. flooring performance.

rubber stair treads C O L O R S

Rubber stair treads are available in the following Distinct Designs Rubber Tile color palettes.

updated
flextones palette

flextones® C O L O R S



See page 11
for all 57 colors
available

evolving styles® creative elements C O L O R S




See page 13
for all 16 colors
available

evolving styles® wood elements C O L O R S



See page 15
for all 4 colors
available


spextones™ C O L O R S



See page 17
for all 22 colors
available

Rubber treads with our exclusive metal-reinforced nose enhance performance and durability.

25-year warranty



Magnified cutaway to show metal-reinforced nose.

Catholic Memorial School,
Roxbury, Massachusetts
Complete specs on pages 58-63.

vinyl stair treads

C O M M E R C I A L + S T A N D A R D

FLEXCO®

5
TOP

- 1 **Commercial weight VT in 1/4" gauge for heavy traffic**
- 2 **Standard weight LVT in 5/32" gauge for residential applications**
- 3 **Exceeds ADA recommendations for slip resistance**
- 4 **Highly resistant to soil and stains**
- 5 **Ribbed inserts or grit strips available**



EnviroFlex™ product. May contribute to one or more LEED® credits.



M

ade of tough, long-wearing vinyl with a specially designed safety rib surface, FLEXCO® vinyl stair treads are engineered to meet all the demands of high traffic areas – particularly in settings where design counts.



vinyl stair treads
C O L O R S



Black Dahlia
01



Bark
02



Medium Gray
014



Bagel
019



Dark Beige
037



Sahara
362



Mineral Gray
363



Greystone
364



Rain Forest
368



Khaki
371



Amber
372



Mocha
382



French Vanilla
384



Cobalt
387



Storm Gray
395

Complete specs on page 64.

flexterior®

METAL STAIR TREADS

- 1 Extruded heat-treated aluminum is resistant to corrosion
- 2 Anti-slip epoxy coating with mineral abrasive grits
- 3 Excellent slip resistance
- 4 UV-stable, custom color matching available
- 5 Pre-drilled with countersunk holes for flush finish


Made in the
U.S.A.

FLEXCO®



Outdoors in rugged conditions, indoors in industrial or commercial applications, FlexTerior® treads provide a slip resistant surface that's made to last. Made of exterior-grade aluminum and inlaid with an epoxy and abrasive grit blend, FlexTerior® treads are ideal for installation on new or existing stairs and landings.



FLEXCO®
innovative design. flooring performance.

M E T A L T R E A D S

flexterior® treads
C O L O R S



Ash



Cactus



Coal*



Sunshine*



Tomato



Walnut



Sapphire

*Coal/Coal and Coal/
Sunshine color
combinations in stock.
All other combinations
are special order. Color
selections must be made
from actual samples.

University of North Alabama,
Florence, Alabama
Complete specs on page 65.

rubber stair treads

Smooth




Radial[®]



Heavy Duty Smooth 120, 130 & 170

GAUGE	3/16" at nose
DEPTH	12-1/4"
LENGTHS	36", 42", 48", 54", 60", 66", 72"
NOSE	Square
PIECES /CTN	10
WEIGHT /LIN FT (LB)	1.5
MATCHING PROFILE	Smooth Tile or Sheet and Diamond Landing




Grit strips for 130 in black only.

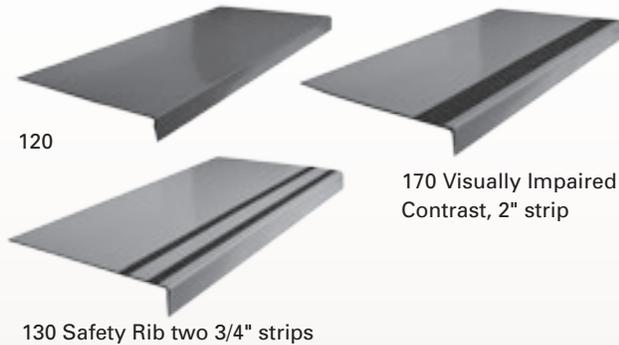

Extra Heavy Duty Radial[®] 500 & 575

GAUGE	5/16" at nose
DEPTH	12"
LENGTHS	36", 42", 48", 54", 60", 66", 72"
NOSE	Square
PIECES /CTN	6
WEIGHT /LIN FT (LB)	2.8
MATCHING PROFILE	Radial [®] High Profile (RBT)

Exclusive metal-reinforced nose included.

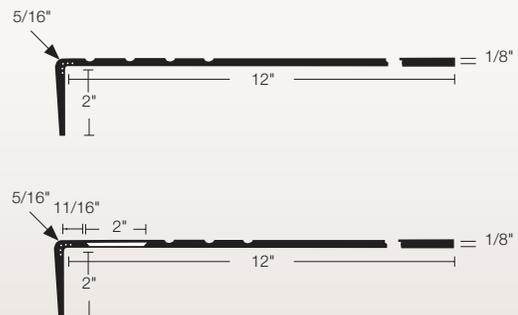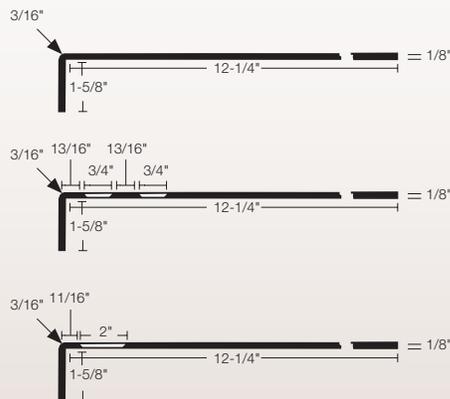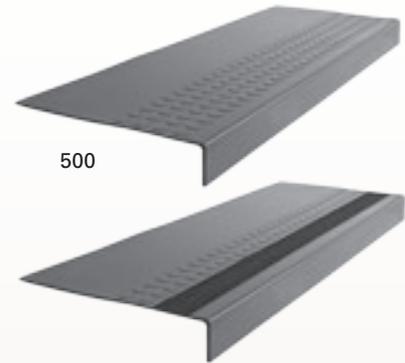




See page 67 for information on smooth and ribbed rubber inserts or abrasive strips.

Radial®



high profile RBT

Diamond



**Heavy Duty Radial®
550 & 585**


GAUGE	3/16" at nose
DEPTH	12"
LENGTHS	36", 42", 48", 54", 60", 66", 72", 78", 84", 90", 96", 102", 108"
NOSE	Square, adjustable to 60°
PIECES /CTN	6 (72" or less), 4 (84" and up)
WEIGHT /LIN FT (LB)	2.4
MATCHING PROFILE	Radial® High Profile (RBT)

**Extra Heavy Duty Diamond
600 & 675**


GAUGE	5/16" at nose
DEPTH	12"
LENGTHS	36", 42", 48", 54", 60", 66", 72"
NOSE	Square
PIECES /CTN	6
WEIGHT /LIN FT (LB)	600 2.8 / 675 2.4
MATCHING PROFILE	Smooth Tile or Sheet and Diamond Landing



550

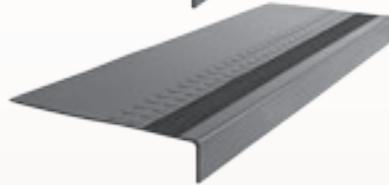



585 Visually Impaired Contrast 2" strip

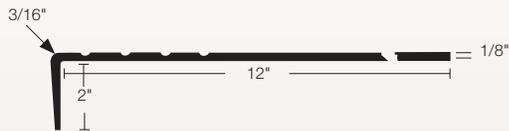

600




675 Textured/Visually Impaired Contrast 2" strip

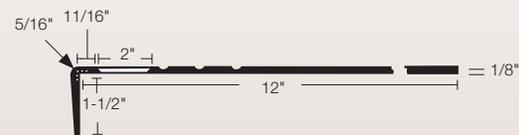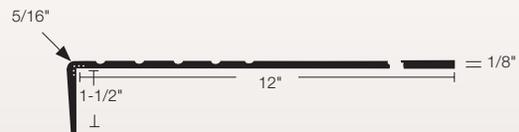


Exclusive metal-reinforced nose included.

rubber stair treads

Diamond



Radial[®] II







Heavy Duty Diamond 650 & 685

GAUGE	Square 1/4" & round 7/64" at nose
DEPTH	12"
LENGTHS	36", 42", 48", 54", 60", 66", 72", 78", 84", 90", 96", 102", 108"
NOSE	Round Nose only up to 72" in length
PIECES /CTN	6 (72" or less), 4 (84" and up)
WEIGHT /LIN FT (LB)	2.25
MATCHING PROFILE	Smooth Tile or Sheet and Diamond Landing

Heavy Duty Radial[®] II 701 & 776


GAUGE	3/16" at nose
DEPTH	12"
LENGTHS	36", 42", 48", 54", 60", 66", 72", 78", 84", 90", 96", 102", 108"
NOSE	Square, adjustable to 60°
PIECES /CTN	6 (72" or less), 4 (84" and up)
WEIGHT /LIN FT (LB)	2
MATCHING PROFILE	Radial [®] II (RGT)

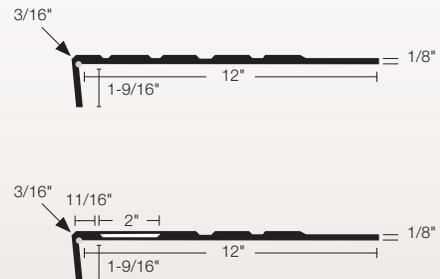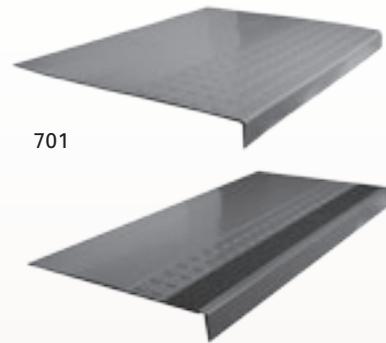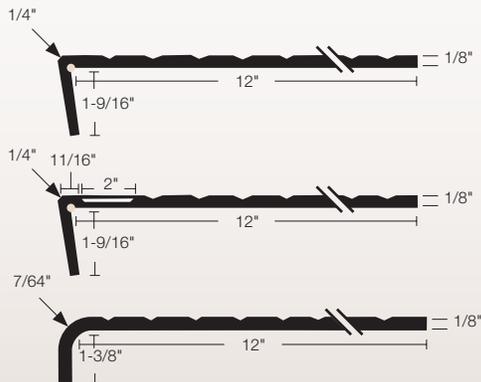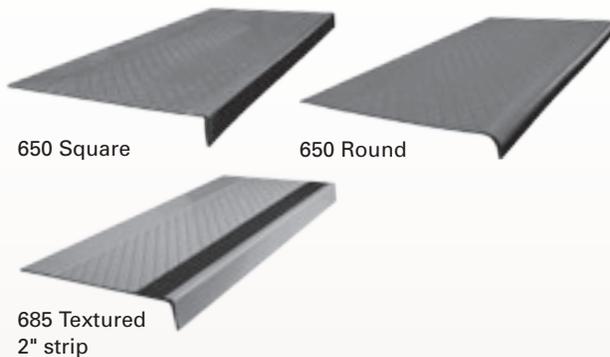




See page 67 for information on smooth and ribbed rubber inserts or abrasive strips.

Radial® II



Square²



**Heavy Duty Extended Radial® II
701E & 776E**

GAUGE	1/4" at nose
DEPTH	15"
LENGTHS	36", 42", 48", 54", 60", 66", 72"
NOSE	Square, adjustable to 60°
PIECES /CTN	6
WEIGHT /LIN FT (LB)	2
MATCHING PROFILE	Radial® II (RGT)

**Heavy Duty Square²
800 & 875**

GAUGE	1/4" at nose
DEPTH	12-1/4"
LENGTHS	36", 42", 48", 54", 60", 66", 72"
NOSE	Square
PIECES /CTN	6 (72" or less)
WEIGHT /LIN FT (LB)	2.8
MATCHING PROFILE	Square ² (SQ)

Exclusive metal-reinforced nose included.




701E





776E Visually Impaired Contrast




800

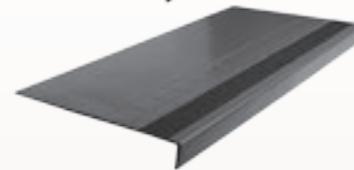

875 Visually Impaired Contrast 2" strip

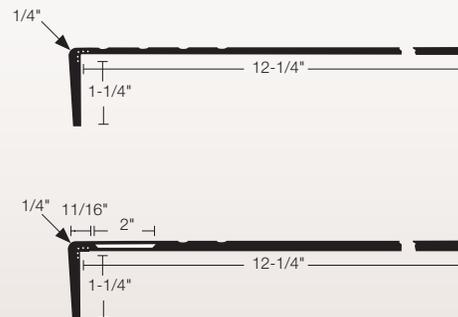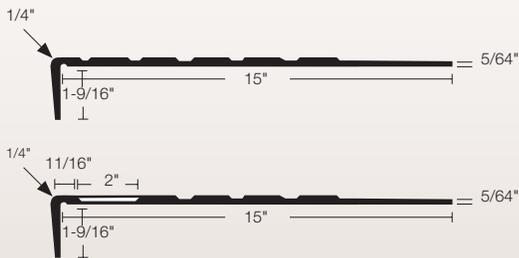


Hammered




Heavy Duty Hammered Tread with Adjustable Square Nose 900 & 975


GAUGE	13/64" at nose
DEPTH	12-1/2"
LENGTHS	36", 42", 48", 54", 60", 66", 72", 78", 84", 90", 96", 102", 108"
NOSE	Square, adjustable
PIECES /CTN	6 (72" or less), 4 (84" and up)
WEIGHT /LIN FT (LB)	2.0
MATCHING PROFILE	Hammered (SE)

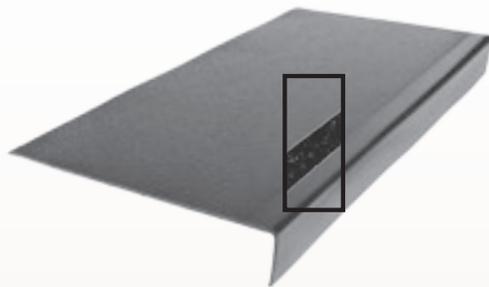

900 975 Visually Impaired Contrast 2" strip

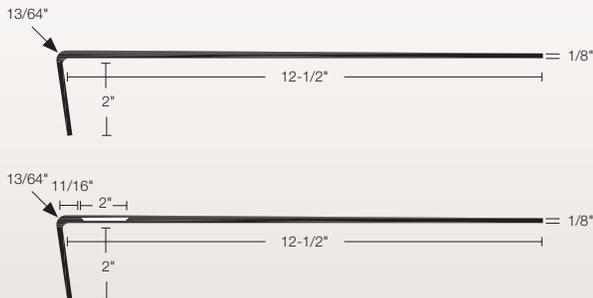


Radial[®] II





Heavy Duty Radial[®] II One-Piece Tread with Riser 1701 & 1776

GAUGE	1/4" at nose
DEPTH	20-1/2"
LENGTHS	36", 42", 48", 54", 60", 66", 72", 78", 84", 90", 96", 102", 108"
NOSE	Square, adjustable to 60°
PIECES /CTN	6 (48" or less), 4 (54" and up)
WEIGHT /LIN FT (LB)	2.5
MATCHING PROFILE	Radial [®] II (RGT)

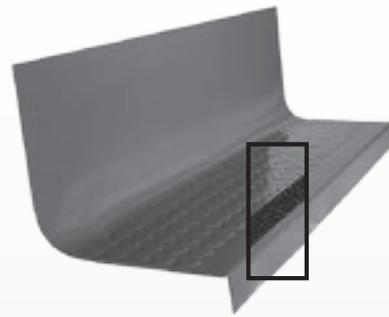


1701 1776 Visually Impaired Contrast 2" strip

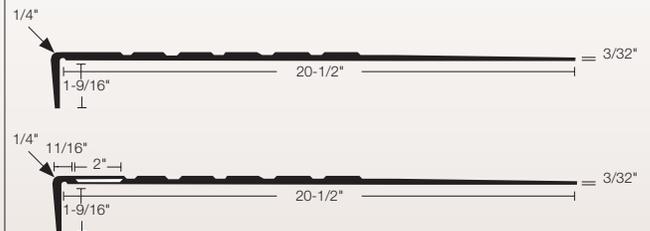



See page 67 for information on smooth and ribbed rubber inserts or abrasive strips.


Hammered



SE

Heavy Duty Hammered One-Piece Tread with Riser 1900 & 1975

GAUGE	13/64" at nose
DEPTH	20-3/8"
LENGTHS	36", 42", 48", 54", 60", 66", 72"
NOSE	Square
PIECES /CTN	6
WEIGHT /LIN FT (LB)	2.5
MATCHING PROFILE	Hammered (SE)

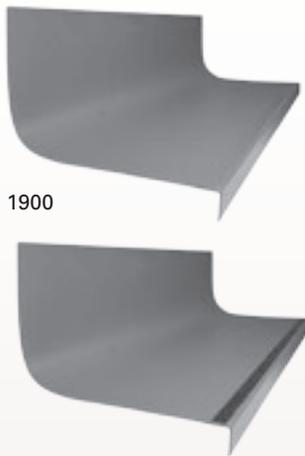


1900

1975 Visually Impaired Contrast, 2" strip




Tread Options for 701, 776, 1701, 1776, 701E, 1776E

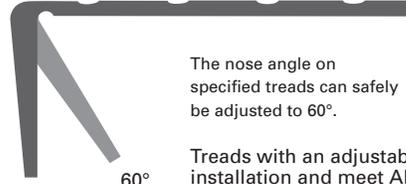

The nose angle on specified treads can safely be adjusted to 60°.

Treads with an adjustable nose help speed installation and meet ADA recommendations.

Tread Options for 500, 575, 600, 675, 800, 875

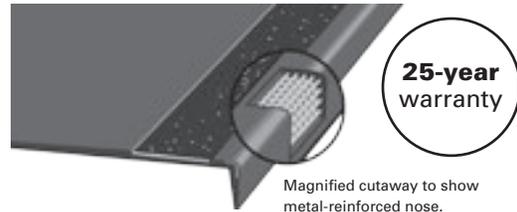


25-year warranty


Magnified cutaway to show metal-reinforced nose.

Rubber treads with our exclusive metal-reinforced nose enhance performance and durability.

Rubber Stringers + Risers



STR



RSR

STR

RSR

order prefix: **STR***

order prefix: **RSR****

Stringer Material

Risers

Gauge	.080"
Size	10" x 72"
Pieces /Ctn	10
Weight /Lin Ft (lb)	0.65

Gauge	1/8" solid
Size	1/8" marbledized
Height	7"
Lengths	36", 42", 48", 54", 60", 72", 84", 96", 108"
Pieces /Ctn	24
Weight /Lin Ft (lb)	0.75

*Risers over 84" will be packaged 10 per carton.

*Use prefix SSTR for SpexTones™ colors. **Use prefix SRSR for SpexTones™ colors.
> Rubber stringers and risers available in FlexTones®, SpexTones™ and Evolving Styles® colors.



Rubber Tread, Risers & Stringers Recommended Adhesives

- AW-510 Acrylic Wet-Set Adhesive
- TP-620 Pressure-Sensitive Tape Adhesive
- C-630 Contact Adhesive
- MS-700 Modified Silane Wet-Set Adhesive
- EW-710 Epoxy Wet-Set Adhesive


EN-610 Epoxy Nose Filler Adhesive must be used in conjunction with all stair tread adhesive installations.



Standard Safety Rib Tread

order prefix: **LVT**


GAUGE	5/32" at nose
DEPTH	12-1/4"
LENGTHS	42", 48", 72" 36" Available w/Min. Order 50 Treads
NOSE	Round or square
PIECES /CTN	10
WEIGHT /LIN FT (LB)	1.5




Commercial Safety Rib Tread

order prefix: **VT**

GAUGE	1/4" at nose
DEPTH	12-1/4"
LENGTHS	42", 48", 72" 36" Available w/Min. Order 50 Treads
NOSE	Round or square
PIECES /CTN	6
WEIGHT /LIN FT (LB)	2

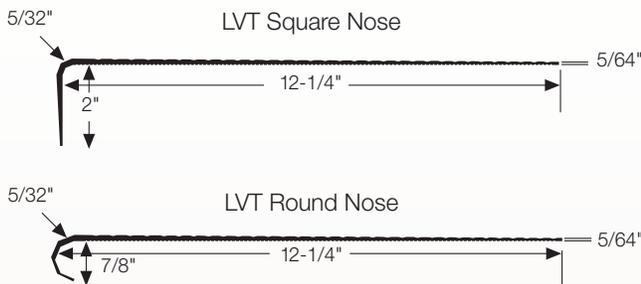

Adjustable nose portion should be secured with contact adhesive or FlexTape according to FLEXCO[®] instructions.

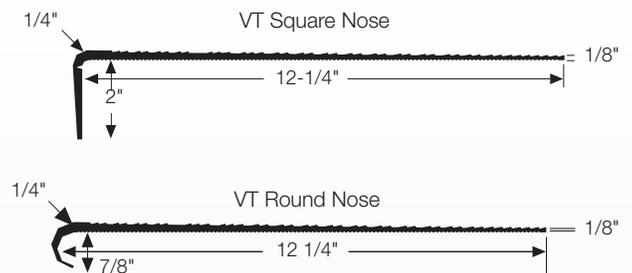

Adjustable nose portion should be secured with contact adhesive or FlexTape according to FLEXCO[®] instructions.

Vinyl Stringers + Risers



STV

order prefix: **STV**

Stringer Material
Gauge .080"
Size 10"
Length 50' rolls
Weight/ 38
Lin Ft (lb) 0.75



RSV

order prefix: **RSV**

Risers
Gauge .080" solid
Height 7"
Length 50' rolls
Weight/ 38
Lin Ft (lb) 0.75



Vinyl Tread, Risers & Stringers Recommended Adhesives

AW-510 Acrylic Wet-Set Adhesive
TP-620 Pressure-Sensitive Tape Adhesive
C-630 Contact Adhesive
MS-700 Modified Silane Wet-Set Adhesive
EW-710 Epoxy Wet-Set Adhesive

EN-610 Epoxy Nose Filler Adhesive must be used in conjunction with all stair tread adhesive installations.

flexterior® metal treads





FlexTerior® Treads order prefix: **FLEX**

GAUGE	1/4" overall
DEPTH	4", 9", plus 11"
LENGTHS	36", 48" Over 48" Special Order
NOSE	Square
PIECES /CTN	6 Special Order TBD
WEIGHT /LIN FT (LB)	2.2 for 9" or 2.76 for 11"
SCREW PACKAGING	36" - 9 per set 48" - 13 per set


Note: Must indicate concrete or wood installation for proper mechanical fasteners. A premium-grade, exterior polyurethane adhesive approved by the adhesive manufacturer for bonding aluminum directly to concrete, exterior-grade plywood or metal is required.

*Leave room for contraction and expansion of treads when taking measurements for depth and length.

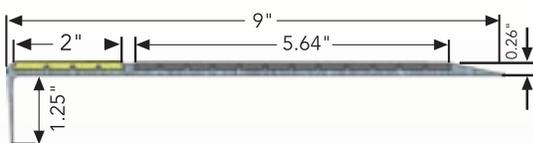

Adhesive Options

Specify type of installation for correct screws. Premium-grade, exterior polyurethane construction adhesive required.

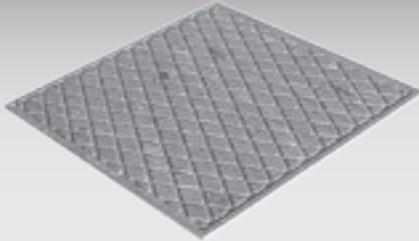

diamond landing rubber tile


order prefix: **DSA**

GAUGE	3/16"
SIZE	27" x 27"
PIECES /CTN	6
WEIGHT /CTN (LB)	40.2
SQ FT /CTN	30.37



Rubber risers, stringers, landing tiles, assurance detectable warning tile (ADWT) and other accessories make up the common denominators for use with FLEXCO® rubber stair treads.

- > Diamond pattern landing tiles are available in Evolving Styles®, SpexTones™ and FlexTones® colors to match our stair treads.

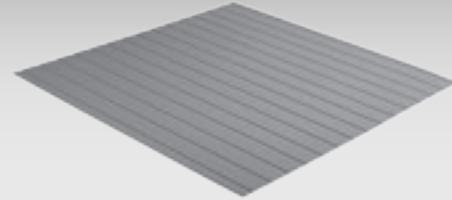

warning tile

order prefix: **ADWT**

GAUGE	1/8"	1/8"	1/8"
SIZE	12" x 12"	12" x 36"	36" x 36"
WEIGHT /CTN (LB)	50	60	60
SQ FT /CTN	45	54	54



EnviroFlex™ product. May contribute to one or more LEED® credits.

Assurance detectable warning tile features deeply set, pre-grooved strips which can be "felt" through a cane or walking device to alert the visually impaired of approaching stairways.

- > Meets ANSI A117.1/705.3.3 for detectable warnings on walking surfaces.



warning tile colors



inserts + strips




smooth + ribbed rubber inserts

FLEXCO® stair treads with smooth and ribbed inserts provide a tactile surface that's durable and easy to clean. In addition, the low-profile 2" strips are available in FlexTones® colors and 075 Canary for easy coordination with our wall base, tiles, risers, stringers and accessories.

- > Available in FlexTones® colors plus Canary Yellow.
- > Ideal for vinyl treads as well as all rubber tread in profiles.
- > Available to meet ADA requirements for contrasting color.
- > Canary smooth and ribbed inserts meet OSHA safety standards.
- > Meets California state standard code Title 24, Section 2-3306 (R).

smooth order prefix: **SVI**

ribbed order prefix: **RVI**

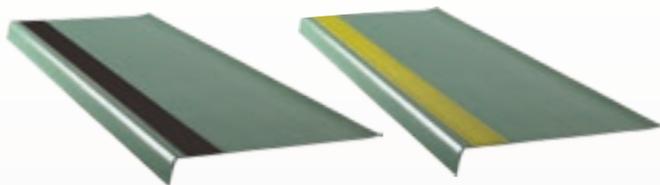

updated palette

abrasive strips

order prefix: **GRIT**

Rubber and vinyl stair treads with abrasive grit strips are available in Glow-in-the-Dark and other colors to meet OSHA, ADA, CA Title 24 and DIN requirements. The 3/4" strips for the 130 treads are available in black only and the 2" strips are available in all colors listed below.

- > Available to meet ADA requirements for contrasting color.
- > Yellow striping meets OSHA safety standards.
- > Glow-in-the-Dark luminescent safety strips meet DIN 67510.
- > Meets California state standard code Title 24, Section 2-3306 (R).

abrasive grit strip colors



Color selections must be made from actual samples.

smooth + ribbed rubber insert strip colors

Smooth + ribbed rubber inserts are available in all 57 FlexTones® colors shown, plus Canary Yellow.



[®]
FLEXCO

wall base

R U B B E R + V I N Y L



It's the perfect finishing touch. The final element of style to transition your look from wall to floor.

And FLEXCO® provides the fine design lines to enhance your space with color, durability and added dimension. From the smooth runs of Wallflowers® that conform to curves and angles with ease, to the many faces of Base Sculptures™, FLEXCO® wall base brings a room together.

FLEXCO®
innovative design. flooring performance.

wallflowers®



wood elements™



base sculptures™



base 2000™



vinyl



health design™



wallflowers®

P R E M I U M R U B B E R W A L L B A S E

FLEXCO®

5
TOP

- 1 **Type TS vulcanized rubber**
- 2 **Superior finish, resists scuffing and gouging**
- 3 **FlexOne pricing – solid colors all one price**
- 4 **Will not shrink – dimensionally stable**
- 5 **Homogeneous color**



EnviroFlex™ product. May contribute to one or more LEED® credits.



Made in the U.S.A.

W

allflowers® is the highest quality thermoset – Type TS – vulcanized rubber base on the market. It retains its visual appeal and color over the long term with very little maintenance, so it's perfect for minimizing life cycle costs.

wallflowers®
C O L O R S

Black Dahlia 01	Bark 02	Charcoal 03	Coffee Bean 04	Corn Silk 05
Cobblestone 06	Ginger 07	Autumn 08	Linen 011	Burlwood 012
Blue 013	Medium Gray 014	Taupe 016	Baby's Breath 018	Neutrail 020
Almond 022	Pebble 023	Stone 024	Light Gray 025	Arctic White 029
Meridian Bone 030	Dune 032	Doe 033	Barley 034	Delft Pansy 035
Gray 036	Dark Beige 037	Outer Banks 038	Fjord 043	True White 046
Vizcaya Palm 047	Berry 048	Winsor 049	Polo Green 052	Milk Chocolate 056
Blue Shadow 058	Plum Pudding 059	Sunflower 061	Earth 062	Mediterranean Green 063
Honey 064	Cappuccino 065	Black Brown 071	Chocolate 072	Burnt Sienna 073
Seashell 074	Driftwood 077	Umber 078	Red Rock 079	Sierra Red 080
Antique White 089	Nickel 090	Titanium 091	Graystone 092	Graphite 093
Buff 094	Gunmetal 095	Goldenrod 096	Basil 097	Wheat 098



The Wallflowers® colors shown include all 57 FlexTones® colors (see page 11) to match rubber floor tiles, stair treads, ribbed inserts, risers, stringers and accessories. Wallflowers® are also available 018 Baby's Breath, 029 Arctic White, 046 True White and 089 Antique White.

wood elements™

W A L L B A S E



- 1 Type TP thermoplastic rubber**
- 2 Resilient rubber-vinyl blend provides good flexibility**
- 3 Durable finish**
- 4 Dimensionally stable**
- 5 Precise gauging and a durable laminated finish**

 EnviroFlex™ product. May contribute to one or more LEED® credits.



W

ith FLEXCO® Wood Elements™ wall base, you get a thermoplastic Type TP rubber base that gives you the look of true wood base and the many benefits of rubber base at a lower price than wood molding. It's everything you need to create unique and eye-catching flooring designs.



FLEXCO[®]
innovative design. flooring performance.

wood elements[™]
C O L O R S



Simply Cherry
WEC-104



Vintage Pecan
WEC-105



Amber Maple
WEC-106



Classic Oak
WEC-107

Complete specs on page 84.

base sculptures™

W A L L B A S E S Y S T E M



- 1 Type TP thermoplastic rubber**
- 2 40' seamless rolls available in 4 profiles (Harmony, Merit, Charisma and Reflection) for seamless installations; all other profiles available in 8' lengths**
- 3 Color coordinated inside and outside corner blocks**
- 4 FlexOne pricing – solid colors all one price**
- 5 Paintable surface for infinite color possibilities**

 EnviroFlex™ product. May contribute to one or more LEED® credits.



The look of finely crafted
woodwork always creates an
unmistakable impression. FLEXCO®
Base Sculptures™ wall base offers
the same beautiful aesthetic qualities
and more – increased durability, easy
installation, moisture resistance and
decreased maintenance. That means
you can enjoy the same eye-catching
qualities of real wood without the high
price tag or time-consuming finishing.
Thirteen profiles from which to choose.

updated palette

base sculptures[™]
C O L O R S

Black Dahlia 01	Bark 02	Charcoal 03	Coffee Bean 04	Corn Silk 05
Cobblestone 06	Ginger 07	Autumn 08	Linen 011	Burlwood 012
Blue 013	Medium Gray 014	Taupe 016	Neutrail 020	Almond 022
Pebble 023	Stone 024	Light Gray 025	Arctic White 029	Meridian Bone 030
Dune 032	Doe 033	Barley 034	Delft Pansy 035	Gray 036
Dark Beige 037	Outer Banks 038	Fjord 043	Vizcaya Palm 047	Berry 048
Winsor 049	Polo Green 052	Milk Chocolate 056	Blue Shadow 058	Plum Pudding 059
Sunflower 061	Earth 062	Mediterranean Green 063	Honey 064	Cappuccino 065
Black Brown 071	Chocolate 072	Burnt Sienna 073	Seashell 074	Driftwood 077
Umber 078	Red Rock 079	Sierra Red 080	Nickel 090	Titanium 091
Graystone 092	Graphite 093	Buff 094	Gunmetal 095	Goldenrod 096
Basil 097	Wheat 098	Midnight Blue 099		

The Base Sculptures[™] colors shown include all 57 FlexTones[®] colors (see page 11) to match rubber floor tiles, stair treads, ribbed inserts, risers, stringers and accessories. Base Sculptures[™] palette also includes 029 Arctic White.

base 2000™

W A L L B A S E

FLEXCO®

5
TOP

- 1 **Type TP thermoplastic rubber**
- 2 **Resilient rubber-vinyl blend provides good flexibility**
- 3 **Dimensionally stable**
- 4 **Precise gauging and uniform height conceal floor and wall irregularities**
- 5 **FlexOne pricing – solid colors all one price**

 EnviroFlex™ product. May contribute to one or more LEED® credits.



Made in the U.S.A.

W

ith FLEXCO® Base 2000™, you get a thermoplastic Type TP rubber base that gives you the many benefits of rubber at a lower price.



updated
flextones palette

base 2000™
C O L O R S

Black Dahlia 01	Bark 02	Charcoal 03	Coffee Bean 04	Corn Silk 05
Cobblestone 06	Ginger 07	Autumn 08	Linen 011	Burlwood 012
Blue 013	Medium Gray 014	Taupe 016	Baby's Breath 018	Neutrail 020
Almond 022	Pebble 023	Stone 024	Light Gray 025	Arctic White 029
Meridian Bone 030	Dune 032	Doe 033	Barley 034	Delft Pansy 035
Gray 036	Dark Beige 037	Outer Banks 038	Fiord 043	True White 046
Vizcaya Palm 047	Berry 048	Winsor 049	Polo Green 052	Milk Chocolate 056
Blue Shadow 058	Plum Pudding 059	Sunflower 061	Earth 062	Mediterranean Green 063
Honey 064	Cappuccino 065	Black Brown 071	Chocolate 072	Burnt Sienna 073
Seashell 074	Driftwood 077	Umber 078	Red Rock 079	Sierra Red 080
Antique White 089	Nickel 090	Titanium 091	Graystone 092	Graphite 093
Buff 094	Gunmetal 095	Goldenrod 096	Basil 097	Wheat 098


Midnight Blue
099

The Base 2000™ colors shown include all 57 FlexTones® colors (see page 11) to match rubber floor tiles, stair treads, ribbed inserts, risers, stringers and accessories. Base 2000™ is also available in 018 Baby's Breath, 029 Arctic White, 046 True White and 089 Antique White.

vinyl

W A L L B A S E



- 1 Type TV vinyl**
- 2 Economical wall base option**
- 3 FlexOne pricing – solid colors all one price**
- 4 Superior finish resists scuffing and gouging**
- 5 Homogenous color**

 EnviroFlex™ product. May contribute to one or more LEED® credits.



FLEXCO® Vinyl Type TV wall base offers a superior color finish and quality construction, yet it's made from vinyl, which makes it more economical than rubber for certain applications. When you're looking to save some expense, look no further than FLEXCO® vinyl. No limitations means just that: all wall base sizes are available in all colors, and no matter which shade you choose, all colors in each line are all priced the same.

updated
flextones palette

vinyl wall base
C O L O R S

Black Dahlia 01	Bark 02	Charcoal 03	Coffee Bean 04	Corn Silk 05
Cobblestone 06	Ginger 07	Autumn 08	Linen 011	Burlwood 012
Blue 013	Medium Gray 014	Taupe 016	Baby's Breath 018	Neutrail 020
Almond 022	Pebble 023	Stone 024	Light Gray 025	Arctic White 029
Meridian Bone 030	Dune 032	Doe 033	Barley 034	Delft Pansy 035
Gray 036	Dark Beige 037	Outer Banks 038	Fjord 043	True White 046
Vizcaya Palm 047	Berry 048	Winsor 049	Polo Green 052	Milk Chocolate 056
Blue Shadow 058	Plum Pudding 059	Sunflower 061	Earth 062	Mediterranean Green 063
Honey 064	Cappuccino 065	Black Brown 071	Chocolate 072	Burnt Sienna 073
Seashell 074	Driftwood 077	Umber 078	Red Rock 079	Sierra Red 080
Antique White 089	Nickel 090	Titanium 091	Graystone 092	Graphite 093
Buff 094	Gunmetal 095	Goldenrod 096	Basil 097	Wheat 098



The Vinyl Wall Base colors shown include all 57 FlexTones[®] colors (see page 11) to match rubber floor tiles, stair treads, ribbed inserts, risers, stringers and accessories. Vinyl Wall Base is also available in 018 Baby's Breath, 029 Arctic White, 046 True White and 089 Antique White.

Robert F. Kennedy Community School,
Los Angeles, California
Complete specs on pages 83.

health design™

W A L L B A S E



- 1 Type TP thermoplastic rubber**
- 2 Available in 6' lengths**
- 3 1/8" tapers to .080" gauge for use with multiple types of flooring**
- 4 6" Height for better protection of wall surfaces**
- 5 Heat-weldable for seamless floor installation**

 EnviroFlex™ product. May contribute to one or more LEED® credits.




Made in the
U.S.A.

health Design™ Wall Base and Pre-Formed Inside and Outside Corners were specifically developed to increase productivity and ease of installation compared to traditional time consuming and unsightly on-site flash coving, especially related to corners. Material is designed to be heat welded to recommended FLEXCO® vinyl and rubber flooring products along with competitive heat-weldable resilient solid vinyl tile and vinyl sheet flooring. This unique system also provides an almost seamless application allowing ease of cleaning while aiding in the prevention of bacterial growth. Heat-Weldable Wall Base and Corners are also flexible, which not only makes installations fast and economical, but it helps conceal floor and wall irregularities while providing a tough finish to resist scuffing and gouging. The color is homogeneous throughout the entire thickness of the wall base. The surface texture is an appealing unique matte finish to ensure an attractive transition.

health design™
 wall base
 C O L O R S



Black Dahlia
01

Bark
02



Medium Gray
014

Baby's Breath
018



Almond
022

Arctic White
029



Dune
032

Delft Pansy
035



Dark Beige
037

Vizcaya Palm
047



Winsor
049

Blue Shadow
058



Black Brown
071

Red Rock
079




Sierra Red
080

Vanderbilt Hospital, Nashville, Tennessee
 Complete specs on page 84.


wallflowers[®] order prefix: **WF**

GAUGE	1/8"
WALL HEIGHTS	2-1/2", 4", 4-1/2" and 6"
LENGTHS	48" lengths and 120' rolls
LIN FT/CTN	120' (lengths or rolls)
CORNERS/CTN	30
WEIGHT /CTN (LB)	
2-1/2" COVE	30
2-1/2" STRAIGHT	26
4" COVE	48
4" STRAIGHT	43
4-1/2" COVE	50
6" COVE	69
6" STRAIGHT	69

Cove

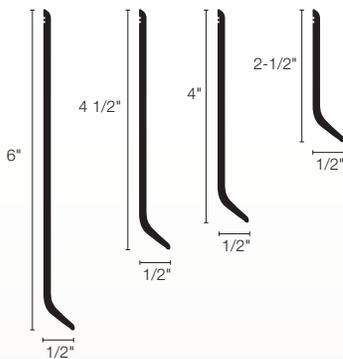


Straight




base 2000[™] order prefix: **B2**

GAUGE	1/8"
WALL HEIGHTS	2-1/2", 4", 4-1/2" and 6"
LENGTHS	48" lengths and 120' rolls
LIN FT/CTN	120' (lengths or rolls)
CORNERS/CTN	30
WEIGHT /CTN (LB)	
2-1/2" COVE	27
2-1/2" STRAIGHT	26
4" COVE	39
4" STRAIGHT	38
4-1/2" COVE	45
4-1/2" STRAIGHT	45
6" COVE	60
6" STRAIGHT	60


Cove

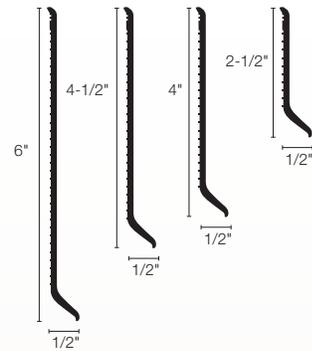

Straight



wall base configurations




corner blocks

for wallflowers, base 2000 and vinyl wall base


vinyl order prefix: **VCB**

GAUGE	1/8" or .080"	
WALL HEIGHTS	2-1/2", 4", and 6"	
LENGTHS	48" lengths and 120' rolls	
LIN FT/CTN	120' (lengths or rolls)	
CORNERS/CTN	30	
WEIGHT /CTN (LB)	1/8"	.080"
2-1/2" COVE	30	20
2-1/2" STRAIGHT	26	22
4" COVE	40	32
4" STRAIGHT	43	32
6" COVE	69	50
6" STRAIGHT	69	52

Cove

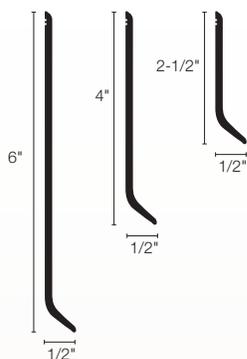

Straight



rubber corner blocks (INSIDE & OUTSIDE)

HEIGHT	Pcs /Ctn	Lbs /Ctn	
2-3/4"	15	1.65	Custom height orders available in 1/2" increments.
4-1/4"	15	2.10	
6-1/4"	15	3.00	

mini corners (FOR STRAIGHT BASE ONLY)

HEIGHT	Pcs /Ctn	Lbs /Ctn	
		Inside	Outside
2-3/4"	15	0.67	0.77
4-1/4"	15	1.04	1.18
6-1/4"	15	1.53	1.74

rubber corner blocks



inside corner

outside corner

mini corners



inside corner

outside corner




Rubber & Vinyl Wall Base & Corners Recommended Adhesives

- AW-510 Acrylic Wet-Set Adhesive
- WB-600 Acrylic Wall Base Adhesive
- C-630 Contact Adhesive


*For non-porous surfaces, use premium-grade, brush-on contact cement.

Color-matched inside and outside corners available

Corners are not available for the following:
4-1/2" or 6" inside corners (IC)
6" outside flat corners (OC)



120' rolls available for seamless installation





wood elements™ order prefix: **WEC**

GAUGE	1/8"
WALL HEIGHTS	4"
LENGTHS	48" lengths and 120' rolls
LIN FT/CTN	120' (lengths or rolls)
CORNERS/CTN	30
WEIGHT /CTN (LB)	
4" COVE	44



health design™ order prefix: **HDB**

GAUGE	1/8" tapers to .080"
WALL HEIGHTS	6"
LENGTHS	72" lengths
LIN FT/CTN	36'
CORNERS/CTN	4
WEIGHT /CTN (LB)	
WALL BASE	34
CORNERS	4

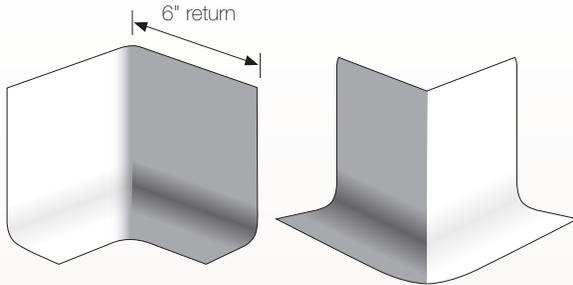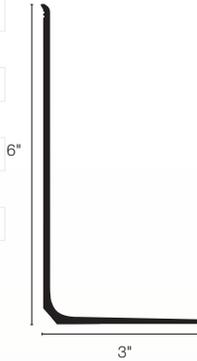

Color-matched
inside and outside
corners available

base sculptures™ See below for order prefixes.

GAUGE	1/8" to 3/8" nominal
WALL HEIGHTS	2-5/8", 4-1/4", 4-1/2", 4-1/2" 4-1/2", 5", 6" and 7-3/4"
LENGTHS	40' rolls or 8' lengths
LIN FT/CTN	40'
CORNERS/CTN	15
WEIGHT /CTN (LB)	

SC	HARMONY	25	40' roll
SC	CHARISMA	40	40' roll
SC	REFLECTION	45	40' roll
SMT	MERIT	16	40' roll
SCW	WHIMSICAL	45	8' pcs, 5 pcs per ctn
SCC	CAPTIVATE	40	8' pcs, 5 pcs per ctn
SCB	BLISS	44	8' pcs, 5 pcs per ctn
SCE	ESCALATE	27	8' pcs, 5 pcs per ctn
SCN	ENCHANTED	37	8' pcs, 5 pcs per ctn
SCR	REGAL	29	8' pcs, 5 pcs per ctn
SCT	TRIUMPH	47	8' pcs, 5 pcs per ctn
SNB	NOBLE	24	8' pcs, 5 pcs per ctn
SCM	MARQUIS	58	8' pcs, 5 pcs per ctn



Rubber & Vinyl Wall Base & Corners Recommended Adhesives

AW-510 Acrylic Wet-Set Adhesive
WB-600 Acrylic Wall Base Adhesive
C-630 Contact Adhesive

*For non-porous surfaces, use premium-grade,
brush-on contact cement.





corners

for base sculptures

rubber corner blocks

HEIGHT	Pcs /Ctn	Lbs /Ctn
Inside & Outside		
4-3/4"	15	2.35
8"	15	3.84

Custom height orders available in 1/2" increments.

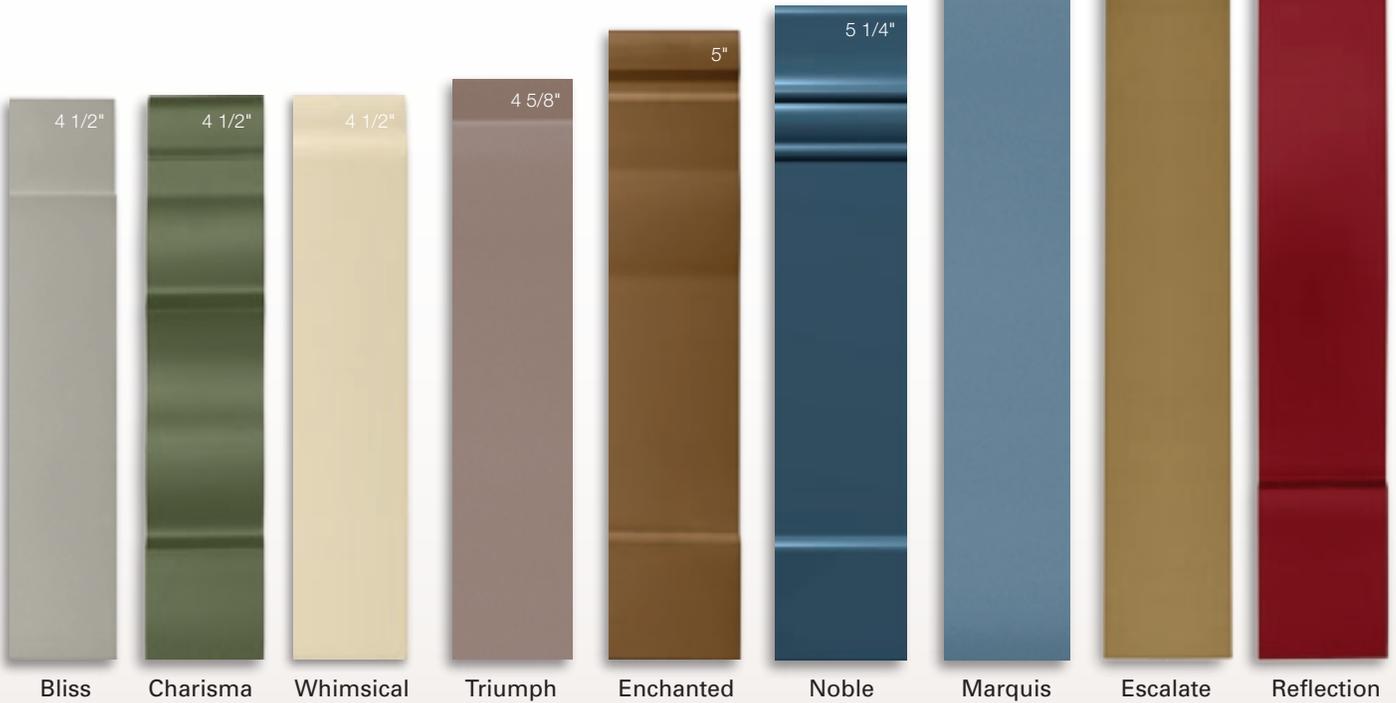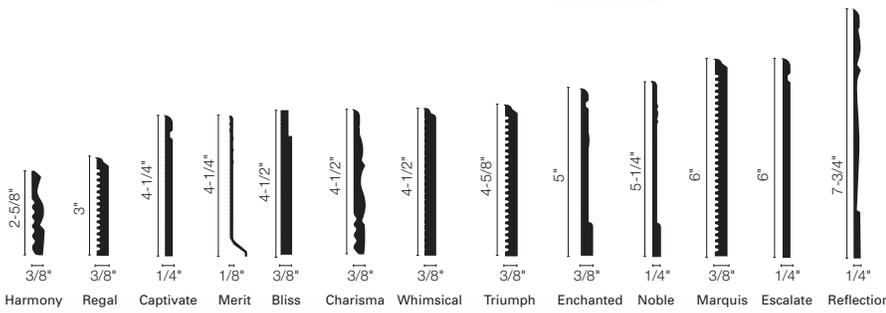


166 quarter round trim

Now designers have another option that outperforms wood and raises the aesthetic level of any application, including Base Sculptures. FLEXCO® 1/2" x 1/2" Quarter Round trim is the perfect finishing touch for many wall base installations and available by request. Quarter Round trim packs as 1-40 ft./roll or in 10-12 ft. sections.



welding beads

R U B B E R + V I N Y L

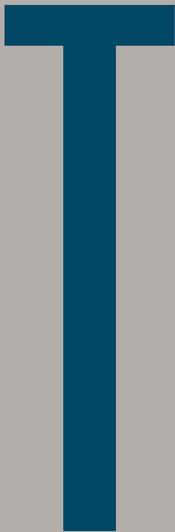

The FLEXCO® Unitized Installation System allows rubber and vinyl tile to be seamlessly installed as a one-piece floor. Pre-grooved floor tiles are fused together with welding beads in matching or contrasting colors. The process is easy, fast and permanent, and the result is a completely seamless “unitized” floor. Welding beads are ideal in areas that have stringent requirements for added hygiene, including operating theaters, laboratories, clean rooms and other areas subjected to continual and extensive wet cleaning. Note: For 36" x 36" rubber and vinyl tiles, square feet divided by 600 equals number of rolls needed. For 24" x 24" tiles, divide by 400 (400 lin. ft. /roll). 50' rolls are also available for use with Health Design Wall Base.

rubber order prefix: **WBR**

FLEXCO® Rubber Welding Beads are available in matching or contrasting colors for rubber tiles or sheets that can be welded.



vinyl order prefix: **WBV**

FLEXCO® Vinyl Welding Beads are available in matching or contrasting colors for solid vinyl tile and ESD static control vinyl tiles.





> Welding Beads are .160" (4mm) in size.



Pre-grooved 24" x 24" and 36" x 36" tile speeds installation.



Welding bead is placed in the groove and fused by heat application.



Welding bead is trimmed in two steps, with an initial trim using a trim plate.



FLEXCO[®] tile may be installed as self-cove.

subleveling

S Y S T E M S



- 1 Rubber/vinyl thermoplastic blend in 1/8", 1/4", 3/8" and 1/2" pre-scored**
- 2 Applies directly over old wood, concrete, vinyl and steel subfloors**
- 3 More flexible than other vinyl leveling products**
- 4 Agent added for protection against mold and bacteria**
- 5 Eliminates waiting on time-consuming leveling compounds to dry**

 EnviroFlex™ product. May contribute to one or more LEED® credits.







W

hen the surface of one subfloor is higher or lower than another, it not only creates a formula for poor aesthetics, it increases the chances of accidents – particularly in high traffic environments. Leave it to FLEXCO® accessories to make the rough spots easy, allowing you to leave more complex approaches behind while looking forward to your next big task at hand. FLEXCO® subleveling systems can put you back on even ground with perfect solutions for all kinds of installations, from educational institutions and retail outlets to hospitality sites and travel centers.

subleveling systems
S P E C I F I C A T I O N S

Item	Gauge	Size	Scoring	Number/ Carton	Wt./ Carton
1/4" Reducer	1/4" taper to .040"	12" x 48"	3/32", 1/8", 3/16"	8	37 lbs.
3/8" Reducer	3/8" taper to .040"	12" x 48"	3/32", 1/8", 3/16", 1/4", 5/16"	8	65 lbs.
1/8" Reducer	1/8" taper to .040"	12" x 48"		16	52 lbs.
1/2" Reducer	1/2" taper to .040"	18" x 48"	3/32", 1/8", 3/16", 1/4", 5/16", 3/8"	4	72 lbs.

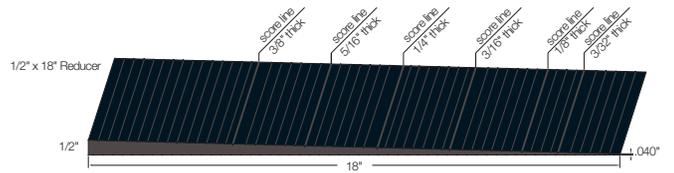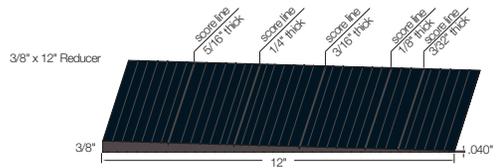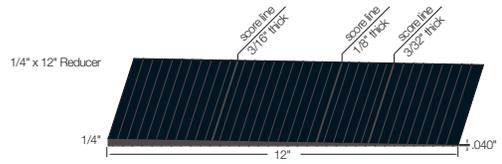

Color varies due to recycled content.



Subleveling Systems Recommended Adhesives


- AW-510 Acrylic Wet-Set Adhesive
- MS-700 Modified Silane Wet-Set Adhesive
- EW-710 Epoxy Wet-Set Adhesive

FLEXCO® vinyl accessories put the finishing touch on any project. Available in many different styles and 57 FlexTones® colors, it's easy to coordinate them with our tile, stair treads and wall base.


 EnviroFlex™ product. May contribute to one or more LEED® credits.

features and benefits


- > Available in 57 FlexTones® colors which coordinate with tiles, wall base and treads (except accessories 101, 102, 140, 141, 194 and 195).
- > FlexOne pricing – solid colors all one price.
- > All adapters, reducers and thresholds meet ADA requirements for transitioning from one floor to another.



193 | Corner Guard
2-1/4" return corner protector
Colors: FlexTones
Packing /Ctn: 6 / 54" sections




101 | Aluminum Single Flange Track
Smooth single flange used with snap-down dividers
Packing /Ctn: 12 / 12' sections




102 | Plastic Single Flange Track
Plastic single flange used with snap-down dividers
Colors: Black only
Packing /Ctn: 10 / 12' sections


adapters/transitions




160 | 3/8" Ceramic/Wood Carpet Transition
Molding for joining 5/16" carpet to 3/8" ceramic/wood flooring
Colors: FlexTones
Packing /Ctn: 10 / 12' sections




163 | Snap-Down T Edge Divider
Joins carpets
Colors: FlexTones
Packing /Ctn: 20 / 12' sections




167 | Tile and Carpet Joiner
Joins 1/4" carpet to 1/8" tile
Colors: FlexTones
Packing /Ctn: 5 / 12' sections




161 | Snap-Down Edging
1-1/4" wide removable section joins tile to wood
Colors: FlexTones
Packing /Ctn: 20 / 12' sections



162 | Snap-Down Divider Joins carpet to tile
Colors: FlexTones
Packing /Ctn: 20 / 12' sections




164 | Snap-Down Super Edge
1-7/8" wide removable section joins carpet to wood/ceramic
Colors: FlexTones
Packing /Ctn: 5 / 12' sections




168 | Resilient-to-Carpet Transition
Provides smooth carpet-to-tile transition
Colors: FlexTones
Packing /Ctn: 20 / 12' sections


edge guards




183 | 1/4" Transition Edge Guard
1/4" butting gauge undercut
Colors: FlexTones
Packing /Ctn: 5 / 12' sections



184 | 5/16" Transition Edge Guard
5/16" butting gauge undercut
Colors: FlexTones
Packing /Ctn: 5 / 12' sections



185 | 3/16" Transition Edge Guard
Undercut, flange and transition combined
Colors: FlexTones
Packing /Ctn: 20 / 12' sections



186 | 1/4" Carpet Edge Guard
Undercut 1/4" with 2" transition
Colors: FlexTones
Packing /Ctn: 10 / 12' sections



Recommended Adhesives for Stair Nosings

EN-610 Epoxy Nose Filler Adhesive

Note: EN-610 MUST be used in conjunction with all stair tread adhesive installations.

Recommended Adhesives for Accessories Prior To / Following Floor Installation

EN-610 Epoxy Nose Filler Adhesive

C-630 Contact Adhesive

EW-710 Epoxy Wet-Set Adhesive


Recommended Adhesives for Accessories During Floor Installation

AW-510 Acrylic Wet-Set Adhesive

MS-700 Modified Silane Wet-Set Adhesive


EW-710 Epoxy Wet-Set Adhesive

cove caps




174 | Tapered Carpet Cove Cap

Trim for covered carpet
Colors: FlexTones
Packing /Ctn: 20 / 12' sections




175 | Square Carpet Cove Cap

Cove cap for 1/4" carpet
Colors: FlexTones
Packing /Ctn: 40 / 12' sections



197 | Square Resilient Cove Cap


1/8" square cap for covered sheet vinyl
Colors: FlexTones
Packing /Ctn: 50 / 12' sections



197R | Tapered Resilient Cove Cap


Cap for covered sheet goods or vinyl tile
Colors: FlexTones
Packing /Ctn: 50 / 12' sections

stair nosings




171 | Carpet Stair Nosing

Undercut nosing for 1/4" and 5/16" carpet
Colors: FlexTones
Packing /Ctn: 5 / 12' sections




187 | Lap Type Square Stair Nosing

Lap type for butting 1/8" tile
Colors: FlexTones
Packing /Ctn: 10 / 12' sections




189 | Top Set Stair Nosing

Square nose for light-duty applications
Colors: FlexTones
Packing /Ctn: 5 / 12' sections



201 | Overlap Stair Nosing


Square nosing, ribbed safety surface
Colors: FlexTones
Packing /Ctn: 10 / 12' sections



202 | Double-Butt Carpet Stair Nosing


Butt to 1/4" carpet
Colors: FlexTones
Packing /Ctn: 10 / 12' sections

fillets/tub mouldings




140 | 1" Tub Moulding

High-gloss, self-stick finish cove for bathtub, counters and shelves
Colors: White or Almond
Packing /Ctn: 24 / 5' sections




141 | 1-1/2" Tub Moulding

High-gloss, self-stick finish cove for bathtub, counters and shelves
Colors: White or Almond
Packing /Ctn: 24 / 5' sections



194 | Fillet Moulding

Superb backing for flashing up the wall
Colors: White only
Packing /Ctn: 25 / 5' sections



195 | Cove Stick Fillet

Superb backing for flashing up the wall
Colors: Black only
Packing /Ctn: 10 / 12' sections

reducers




156 | Underslung Reducer

Binder-bar edging for resilient flooring undercut
Colors: FlexTones
Packing /Ctn: 2 / 35' coils




177A | 3/8" Carpet Edge Reducer

Designed especially for carpet
Colors: FlexTones
Packing /Ctn: 10 / 12' sections




177B | 3/8" Carpet Edge Reducer

Designed especially for 3/8" carpet
Colors: FlexTones
Packing /Ctn: 10 / 12' sections



177B | 5/16" Carpet Edge Reducer

Reducer for 5/16" material including FlexTuff®
Colors: FlexTones
Packing /Ctn: 10 / 12' sections



157 | 1/2" Reducer

For carpet, ceramic tile or wood floors
Colors: FlexTones
Packing /Ctn: 10 / 12' sections



192A | 1/8" Tile Reducer Strip

Beveled edge for resilient flooring material
Colors: FlexTones
Packing /Ctn: 50 / 3' sections

adhesives

FOR TILE, TREAD + WALL BASE



Tile. Sheet. Wall base. Stair treads. Optimum performance starts with quality installation, and Excelsior[™] Adhesives position you to get expected results time after time. They're the perfect match for our products and your production schedule.

spread rates

SP-500 Acrylic Aerosol Pressure-Sensitive Adhesive

CASE QTY

Acrylic aerosol pressure-sensitive adhesive used for installation of LVT and rubber flooring products. Water-based and VOC free, it is highly aggressive with high resistance to moisture and plasticizers. It has excellent initial grab and shear strength making it ideal for fast track construction and commercial installations.

Coverage: Rubber Flooring – 100 sq. ft. per unit; Vinyl Flooring – 150 sq. ft. per unit.

AW-510 Acrylic Wet-Set Adhesive

G 4

Acrylic wet-set adhesive used for the permanent installation of dimensionally stable vinyl, rubber and quartz flooring, wall base and stair tread products. Water-based, low VOC and solvent-free, yet highly aggressive with a high resistance to moisture and plasticizer migration. Adhesive is suitable for heavy traffic or rolling loads and is easy to clean up.

Coverage: 160 sq. ft. per gallon

AP-520 Acrylic Roll-On Pressure-Sensitive Adhesive

2.5

Acrylic, rolled-applied pressure-sensitive adhesive used for installation of LVT and rubber flooring products. It is water-based and VOC free, yet highly aggressive with high resistance to moisture and plasticizers. Suitable for heavy traffic of rolling loads. After installation flooring is immediately usable when using AP-520 and can be immediately heat welded.

Coverage: 1000 sq. ft. per unit

WB-600 Acrylic Wall Base Adhesive

C G 4

Solvent-free, high performance, acrylic wet-set adhesive specifically designed for permanent installation of rubber, TPR and vinyl wall base products and pre-formed corners on vertical surfaces.

Trowel Coverage: 180-340 lin. ft. per gallon depending on trowel/base size

Cartridge Coverage: 30-70 lin. ft. per cartridge depending on base size

EN-610 Epoxy Nose Filler Adhesive

C

Two-component, solvent-free epoxy caulk adhesive designed for use with indoor installations of stair treads and stair nosings. Designed to prevent flex, indentation and premature wear or damage to rubber or vinyl stair treads and stair nosings.

½" Coverage: 25 lin. ft. per cartridge

¼" Coverage: 50 lin. ft. per cartridge

TP-620 Pressure-Sensitive Tape Adhesive

CASE QTY

Solvent-free, pressure-sensitive tape-based adhesive designed for use with indoor installations of stair treads, risers, stringers and cove fillet sticks. It is designed specifically to permanently adhere rubber or vinyl products. Allows for installations to resume use immediately.

Dimensions: 1" x 164' (6 per case); 4" x 164' (3 per case); 9.5" x 164' (1 per case)

color-matched caulks

FLEXCO® color-matched caulks are in stock to coordinate with the colors in our FlexTones® color matching system. They're ideal for touch-ups or hiding installation gaps. Custom colors to match other colors in the line are available.



C-630 Contact Adhesive

Q

VOC free, water-based contact adhesive used for the permanent installation of vinyl and rubber resilient flooring, stair treads, wall base, flash coving and accessories in horizontal or vertical installations. Highly aggressive, it has a high resistance to moisture and plasticizers.

Coverage: 20-40 sq. ft. per unit; 120-140 lin. ft. per unit

MS-700 Modified Silane Wet-Set Adhesive

3

Premium one component modified silane adhesive used for permanent installation of vinyl & rubber flooring products, including recycled or crumb rubber flooring products. It can be installed over porous and non-porous substrates in indoor and outdoor applications, allowing for installation of flooring materials in entrances or areas that are not temperature controlled.

Crumb Rubber Coverage: 135-160 sq. ft. per gallon

Porous Coverage: 160 sq. ft. per gallon

Non-Porous Coverage: 235 sq. ft. per gallon

EW-710 Epoxy Wet-Set Adhesive

G

Non-flammable two-part urethane-modified epoxy adhesive used for permanent indoor installation of vinyl, rubber and quartz flooring products. It is low VOC and solvent-free, yet highly aggressive and cures to an incredibly hard, chemically resistant film for superior adhesive. It can be installed over porous and non-porous substrates in indoor and outdoor applications, allowing for installation of flooring materials in entrances or areas that are not temperature controlled.

Crumb Rubber Coverage: 120 sq. ft. per gallon

Smooth Porous & Non-Porous Coverage: 150 sq. ft. per gallon

Rough Porous Coverage: 135 sq. ft. per gallon

ASD-800 Acrylic Wet-Set ESD Adhesive

G

Acrylic wet-set adhesive designed for indoor installation of ESD vinyl and rubber flooring. When installed in conjunction with ESD tile and a grounding source, it will help dissipate static and electrical discharges to protect electrically sensitive equipment.

Coverage: 160 sq. ft. per gallon

USD-810 Urethane Wet-Set ESD Adhesive

G

Two-part, solvent-free urethane adhesive used for the permanent installation of ESD vinyl and rubber flooring products. Low VOC and solvent-free, yet highly aggressive and cures to a flexible ESD film for superior adhesion. Ideal for areas with heavy use, machinery or rolling loads.

Smooth Porous & Non-Porous Coverage: 150 sq. ft. per gallon

Rough Porous Coverage: 135 sq. ft. per gallon

installation



PRODUCTS

Proper subfloor preparation is the key to great looking and long-lasting floors. These Excelsior™ installation products and underlayments help you achieve your flooring goals.



spread rates

MM-100 Moisture Mitigation

2.5

Water, solvent and VOC-free, polyurethane-based moisture mitigation product used to treat concrete slabs with excessive moisture levels. MM-100 can block moisture up to 20lbs. MVER or 99% RH.

Coverage:
1000 sq. ft. per unit per coat

NP-230 Non-Porous Substrate Primer

2.5

Zero-VOC, water-based primer for use over non-porous substrates, such as Excelsior™ MM-100, to promote adhesion of cementitious materials, such as the Excelsior™ CP-300 patch and Excelsior™ SU-310 self-leveling underlayment.

Coverage:
1000 sq. ft. per unit

CP-300 Cementitious Patch

10

Cement-based rapid-drying, trowelable patch and skim coat for use prior to interior installation of resilient floor materials. It can be used for minor repairs and flattening or for large skim coat installations. CP-300 allows for flooring installation in as little as 30 minutes, providing a fast and easy solution in urgent or fast-track situations.

Coverage:
1/8" - 33 sq. ft. per bag

SU-310 Self-Leveling Underlayment

50

Premium Calcium Aluminate self-leveling underlayment for use prior to installation of resilient flooring materials. SU-310 can be used to smooth and flatten substrates to prevent telegraphing substrate imperfections through flooring materials. It has a long working time while also offering low shrinkage and excellent leveling properties.

Coverage: Refer to data sheet for coverage chart

FiberMat

41.3" x 249' Roll

Fiber reinforcement web used to improve flexural and tensile strength of the SU-310 prior to installation over unstable substrates. FiberMat binder naturally breaks down during the installation of the SU-310, allowing the fibers to disperse and be distributed throughout the installation.

Coverage:
857 sq. ft. per roll

CSU-400 Cork Sound Control Underlayment

3.5' x 100' x 1.9mm Roll

Rolled sound reduction underlayment designed for indoor use under vinyl flooring. CSU-400 reduces sound transmission from room to room while providing thermal insulation and comfort. It can be installed under glue-down or loose lay flooring options.

Coverage:
350 sq. ft. per roll



maintenance

PRODUCTS

FSU-410 Floating Sound Control Underlayment

4' x 35' x 2mm Roll

Rolled sound reduction underlayment specifically designed for indoor use under resilient flooring products. FSU-410 can be installed directly over existing floor coverings such as VAT, Sheet Vinyl, Linoleum and Hardwood Flooring, where other adhesives cannot. FSU-410 is a loose lay product that does not require adhesive to be installed and may be used with floating and glue down resilient floors.

Coverage:
122.5 sq. ft. per roll

We offer a full line of Excelsior™ maintenance products that will make cleaning and maintaining your flooring simple. Visit flexcofloors.com to see the whole line of maintenance products.



rubber tile astm tests and results

COVERS TEXTURED RUBBER, RADIAL®, RADIAL® II, RADIAL® III, SQUARE², WEAVE, SPEXTONES™, AND EVOLVING STYLES® TILE

Standard Specification

ASTM F1344, Specification for Rubber Floor Tile, Class I, Type A

Durability

ASTM F970, Static Load Limit: 250 psi; Modified ASTM F970: 1100 psi; Passes

ASTM D3389, Abrasion Resistance: Passes, <1 gram lost

ASTM F137, Flexibility: Passes, bend around a 1/4" mandrel, no breaks or cracks

ASTM D2240, Hardness (Shore A Durometer): Passes, >85

Resilience

ASTM F925, Resistance to Chemicals: Excellent, list of chemicals available

Slip Resistance

ASTM D2047, Static Coefficient of Friction (Slip Resistance): Excellent, >0.60

Fire Test Data

ASTM E648 (NFPA 253), Critical Radiant Flux: Class 1, >.45 W/cm²

ASTM E662 (NFPA 258), Smoke Generated by Solid Materials: Passes, <450 Fungi Resistance

Fungi Resistance

ASTM G21, Fungi Resistance: Excellent

flextuft® astm tests and results

FOR VULCANIZED AND NON-VULCANIZED RUBBER BACKING

Fire Test Data

ASTM D2859, Pill Test: Passes and exceeds the minimum char radius of 3" (average char per 8 strips tested = 0.75" radius)

Slip Resistance

ASTM D2047, Static Coefficient of Friction (Slip Resistance): Exceeds 0.80

tuflex® force® astm tests and results

Standard Specifications

ASTM D2240 - Hardness, Shore A; Terry²

ASTM D3389 - Abrasion Resistance: Passes, <1 gram lost

ASTM D624 - Tear Resistance; 93 +/- 15 lbs/in

ASTM D412 - Tensile Strength; 525 +/- 100 PSI

ASTM D412 - Elongation; 130% +/- 25%

ASTM D412 - 100% Modulus; 390 +/- 50 PSI

ASTM D2632 - Impact Resistance; 32% Rebound

ASTM D2047 - Coefficient of Friction; >0.60

ASTM E648 - Critical Radiant Flux, Class II; 0.25 watts per sq cm

prime sports™ astm tests and results

Standard Specifications

ASTM D3389 - Abrasion Resistance: Passes, <1 gram lost

ASTM D2047, Static Coefficient of Friction (Slip Resistance): Exceeds 0.80

ASTM F373 - Thickness Tolerance: +/- 0.015"

ASTM D624 - Die C, Tear Strength: 70ppi

ASTM F137 - Flexibility: Passes - 6mm Mandrel

ASTM F1514 - Resistance to Heat: Delta E: 2.24 and AATCC Gray Scale: 3.85 average

ASTM F925 - Resistance to Chemicals: No Change. Staining Agent List - 5% Acetic Acid, 70% Isopropyl Alcohol, Mineral Oil, 5% Sodium Hydroxide, 5% Ammonia, Bleach, 5% Phenol, Gasoline, Sulfuric Acid, Kerosene and Olive Oil.

ASTM F970 - Static Load Limit: 250 psi, (modified 400 psi)

ASTM D2240 - Harness Shore A: 60 +/- 5 minutes

ASTM D395B - Compression Set: 12% or less

ASTM D 792 - Density PCF: 65 lbs/cu/ft

wall base astm tests and results

Standard Specifications

ASTM F1861 (Wallflowers), Type TS, Group 1, Styles A and B

ASTM F1861 (Base 2000), Type TP, Group 2, Styles A and B

ASTM F1861 (Vinyl Base), Type TV, Group 1 or 2, Styles A and B

ASTM F1861 (Base Sculptures), Type TP, Group 1, Style D

Resilience

ASTM F925, Resistance to Chemicals: Passes

ASTM F1515, Light Stability: Excellent

Fire Test Data

ASTM E648 (NFPA 253), Critical Radiant Flux: Class 1, >.45 W/cm²

ASTM E662 (NFPA 258), Smoke Generated by Solid Materials: Passes <450

rubber stair treads astm tests and results

Standard Specification

ASTM F2169, Type TS Class 1 & 2; Group 1 & 2 Grade 1

Durability

ASTM F970, Static Load Limit: 250 psi; Modified ASTM F970: 650 psi

ASTM D3389, Abrasion Resistance: Passes, <1 gram lost

ASTM F137, Flexibility: Passes, 1/4" mandrel, no breaks or cracks

Resilience

ASTM F925, Resistance to Chemicals: Excellent, list of chemicals available

ASTM F1515, Light Stability: Passes, flat surface, Delta E < 8.0

Fire Test Data

ASTM E648 (NFPA 253), Critical Radiant Flux: Class 1, > 0.45 W/cm²

ASTM E662 (NFPA 258), Smoke Generated by Solid Materials: Passes, <450

Slip Resistance

ASTM D2047, Static Coefficient of Friction (Slip Resistance): Excellent, >0.60 flat surfaces using Neolite sensors

Fungi Resistance

ASTM G21, Fungi Resistance: Excellent

vinyl stair treads astm tests and results

Standard Specification

ASTM F2169, Type TV

Durability

ASTM F970, Static Load Limit: 250 psi; Modified ASTM F970: 650 psi

ASTM D3389, Abrasion Resistance: Passes, <1 gram lost

ASTM F137, Flexibility: Passes, bend around a 1" mandrel, no breaks or cracks

Resilience

ASTM F925, Resistance to Chemicals: Excellent, list of chemicals available

ASTM F1515, Light Stability: Passes, flat surface, Delta E < 8.0

Fire Test Data

ASTM E648 (NFPA 253), Critical Radiant Flux: Class 1, >.45 W/cm²

ASTM E662 (NFPA 258), Smoke Generated By Solid Materials: Passes, <450

Slip Resistance

ASTM D2047, Static Coefficient of Friction (Slip Resistance): Excellent, >0.60

esd rubber tile astm tests and results

Standard Specification

ASTM F1344, Specification for Rubber Floor Tile, Class I, Type A

Durability

ASTM F970, Static Load Limit: 250 psi; Modified
ASTM F970: 1100 psi; Passes

ASTM F137, Flexibility: Passes, bend around a 1/4" mandrel, no breaks or cracks

ASTM D2240, Hardness (Shore A Durometer): Passes, >85

Electrical Resistance

ASTM F150, Electrical Resistance for Resilient Flooring; 1×10^6 to 1×10^9

Resilience

ASTM F925, Resistance to Chemicals: Excellent, list of chemicals available

Slip Resistance

ASTM D2047, Static Coefficient of Friction (Slip Resistance): Excellent, >0.60

Fire Test Data

ASTM E648 (NFPA 253), Critical Radiant Flux: Class 1, >.45 W/cm²

ASTM E662 (NFPA 258), Smoke Generated by Solid Materials: Passes, <450

Fungi Resistance

ASTM G21, Fungi Resistance: Excellent

delane[®] esd vinyl tile astm tests and results

Standard Specification

ASTM F1700 - Specification for Solid Vinyl Tile; Class I, Type A

Durability

ASTM F970 - Static Load Limit; 250 PSI; Modified
ASTM F970, 2000 PSI

Electrical Resistance

ASTM F150 - Electrical Resistance; • Conductive, 2.5×10^4 to 1×10^6 • Static Dissipative, 1×10^6 to 1×10^9 • ANSI/ESD S7.1, NFPA 99

Resilience

ASTM F925 - Resistance to Chemicals; Passes, List of chemicals available

ASTM F1515 - Light Stability; Passes

Slip Resistance

ASTM D2047 - Static Coefficient of Friction (Slip Resistance); >0.60; dry

Fire Test Data

ASTM E648 (NFPA 253) - Critical Radiant Flux; Class 1, >.45 W/cm²

ASTM E662 (NFPA 258) - Specific Optical Density of Smoke Generated by Solid Materials; Passes, <450

natural elements premium luxury vinyl tile wood and natural elements premium luxury vinyl tile stone astm tests and results

Standard Specification

ASTM F1700, Specification for Solid Vinyl Tile: Class III, Type B

Fire Test Data

ASTM E648 (NFPA 253) - Critical Radiant Flux; Class 1, >.45 W/cm²

ASTM E662, Smoke Density; Passes

Durability

ASTM F970, Static Load Limit: 250 psi; Modified
ASTM F970: 2000 psi

Resilience

ASTM F925, Resistance to Chemicals: Excellent, list of chemicals available

ASTM F1515, Light Stability: Passes, flat surface, Delta E < 8.0

Slip Resistance

ASTM D2047 - Static Coefficient of Friction (Slip Resistance); >0.60; dry

solid vinyl tile astm tests and results

COVERS DELANE[®] AND GEODESY[™] TILE

Standard Specification

ASTM F1700, Specification for Solid Vinyl Tile: Class 1, Type A; Federal Specification SS-T-312B, Type III

Durability

ASTM F970, Static Load Limit: 250 psi; Modified
ASTM F970: 2000 psi

Resilience

ASTM F925, Resistance to Chemicals: Excellent, list of chemicals available

ASTM F1515, Light Stability: Passes, flat surface, Delta E < 8.0

Fire Test Data

ASTM E648 (NFPA 253), Critical Radiant Flux: Class 1, >.45 W/cm²

ASTM E662 (NFPA 258), Smoke Generated By Solid Materials: Passes, < 450

Slip Resistance

ASTM D2047, Static Coefficient of Friction (Slip Resistance): Excellent, >0.60

chemical resistance

All FLEXCO[®] products (except FlexTuft[®]) were tested for resistance to various chemicals by placing one cubic centimeter of each chemical on the tile surface and then covering it with a watch glass. The chemicals were allowed to remain in contact with the tile for one hour and for 24 hours. Tiles were then washed with soap and water and allowed to dry under room conditions for 24 hours. Visual evaluations were then made and classified as follows:

No change = Chemical had no visible effect upon the tile or the effect would be eliminated in the course of ordinary maintenance

Surface dulling = Tile suffered loss of gloss

Surface attack = Tile suffered damage such as warping, swelling, blistering, peeling and raised or roughened areas

Stain = Tile discoloration

Chemical	1 Hour	24 hours	Chemical	1 Hour	24 hours
Acids			Xylene	No change	Slight surface attack
Sulfuric Acid (Conc.)	No change	Light purple brown stain, surface dulling	Cresol	No change	Surface attack
Sulfuric Acid (77%)	No change	Light yellow stain, surface dulling	Gasoline (Unleaded)	Slight change	Surface attack
Sulfuric Acid (5%)	No change	No change	Mineral Oil*	Slight change	Surface attack
Nitric Acid (Conc.)	No change	Surface dulling	Carbon Tetrachloride	No change	Slight surface attack
Nitric Acid (5%)	No change	Slight surface attack	Chloroform	No change	Very slight surface attack
Hydrochloric Acid (Conc.)	No change	No change	Trichlorethylene**	Very slight surface attack	Slight surface attack
Hydrochloric Acid (5%)	No change	Slight surface attack	Ketones/Esters		
Hydrofluoric Acid (Conc.)	No change	No change	Acetone	Very slight surface attack	Surface attack
Hydrofluoric Acid (5%)	No change	No change	Methyl Ethyl Ketone	Very slight surface attack	Surface attack
Acetic Acid (Conc.)	No change	Slight surface attack	Amyl Acetate	No change	Surface attack
Acetic Acid (5%)	No change	No change	Ethyl Acetate	No change	Surface attack
Alcohols			Miscellaneous		
Isopropyl Alcohol (70%)	No change	No change	Silver Nitrate (5%)	No change	Brown/black stain
Methyl Alcohol	No change	No change	Ethyl Ether	No change	Very slight surface attack
Ethyl Alcohol	No change	No change	Formaldehyde (40%)	No change	No change
Butyl Alcohol	No change	Slight surface attack	Creosote	Yellow stain	Dark brown stain, surface attack
Alkalies			Thimerosal	No change	Pink stain
Sodium Hydroxide (5%)	No change	No change	Iodine	No change	Dark yellow stain
Ammonium Hydroxide (28%)	No change	No change	Bleach (5.25% NaOCl)	No change	No change
Aromatics					
Phenol	No change	Slight surface attack			
Benzene	No change	Slight surface attack			

* Rubber tile subject to surface attack at 24 hours.

** Rubber tile not affected.



Wallflowers Wall Base or Base 2000 Wall Base



Hammered (SE) Tile



Radial® (RBT) Tile



Heavy Duty Radial® 550 Tread

Xpress

F L O O R I N G O P T I O N S



Our Xpress Ship flooring options provide expedited delivery of **six of our most popular products in eight colors**. Choose from coordinated wall base, tile and stair tread options that provide the products you need and the service you want. Daily stock means fast delivery to keep your installation on schedule.

Xpress ship daily stock availability


Wallflowers® Premium Wall Base	4" x 48"	30 pcs per box	250 cartons per color in stock daily
Base 2000™ Wall Base	4" x 48"	30 pcs per box	250 cartons per color in stock daily
Radial® RBT Tile	18" x 18"	20 pcs per carton	3,000 square feet per color in stock daily
Hammered Tile	18" x 18"	20 pcs per carton	1,000 square feet per color in stock daily
Radial® 550 Treads	48"	6 pcs per carton	200 pieces per color in stock daily
Hammered 1900	48"	6 pcs per carton	50 pieces per color in stock daily



sample requests

R U B B E R + V I N Y L

FLEXCO® has a variety of sampling kits and chain sets available to assist with making your flooring, wall base and accessory selections. FLEXCO® offers custom color matching for several of our products and custom cutting to help you bring your design vision to life. Contact customer service at 1.800.633.3151 or submit your request online at flexcofloors.com. You may also email your sample request to samples@flexcofloors.com.

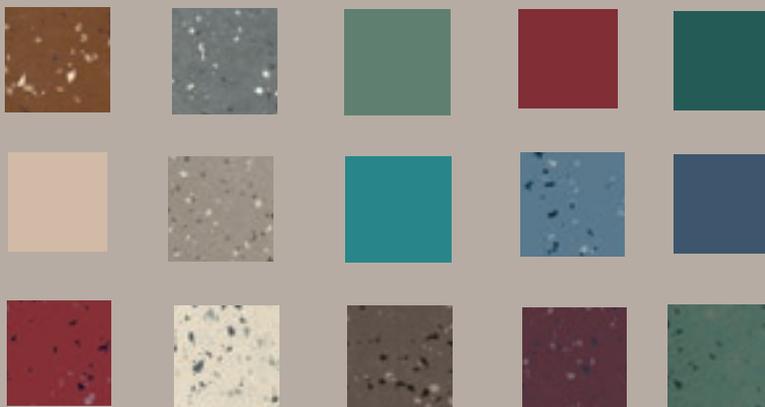

affiliations & certifications

- > AIA, ASID and IIDA Industry Partner
- > Certified Installation Manager Program
- > Coast Guard and International Maritime Organization (IMO) certified products
- > Member of the U.S. Green Building Council
- > Floor Covering Installation Contractors Association
- > The Construction Specifications Institute
- > World Floor Covering Association
- > National Association of Floor Covering Distributors
- > American Public Transit Association
- > ESD Association
- > ASTM Committee
- > Floor Covering Installers of North America
- > International Facility Management Association
- > International Standards and Training Alliance of Floor Covering Professionals (INSTALL)
- > Resilient Floor Covering Institute
- > Color Marketing Group
- > CHPS Standards
- > FloorScore®
- > Tuscumbia, AL Manufacturing Facility
ISO 14001:2015 Certified

flexcofloors.com

1.800.633.3151 + Fax: 1.800.346.9075
1401 East 6th Street + Tuscumbia, AL 35674