

LONSEAL[®]

FLOORING

LONMAT UV

Meets MIL-DTL-15562G, TYPE I

LONMAT UV features an innovative UV-cured urethane finish that simplifies maintenance; this durable, marbled, fire-retardant, electrically-insulating surface has been the foundation of countless naval vessels' high-voltage areas for decades.

Lonmat UV meets the U. S. Military and NATO Switchboard Matting, MIL-DTL-15562G, TYPE I specifications for flooring matting products which insulate workers from electrocution by interrupting the path to ground. Type I Switchboard Matting is often used on ship decking and around electrified equipment where maintenance and operational personal work, and is known for its water-tight integrity with heat-welded seams.

FEATURES *(data shown is nominal):*

Roll size 3': 3 ft. (0.9 m) wide x 75' (22.9 m) length

Roll size 6': 6 ft. (1.8 m) wide x 30' (9.1 m) length

Overall Thickness: 0.126 in. (3.2 mm)

Wear Layer Thickness: 0.051 in. (1.3 mm)

Weight 3': 0.9 lbs./sq. ft., 250 lbs./roll


Weight 6': 0.9 lbs./sq. ft., 200 lbs./roll

MEETS:

U. S. Military and NATO Switchboard Matting,
MIL-DTL-15562G, TYPE I

** Please note that all colors are available in either 3 foot (0.914 m) x 75' (22.86 m) length and 6 foot (1.83 m) width x 30' (9.14 m) length rolls.*



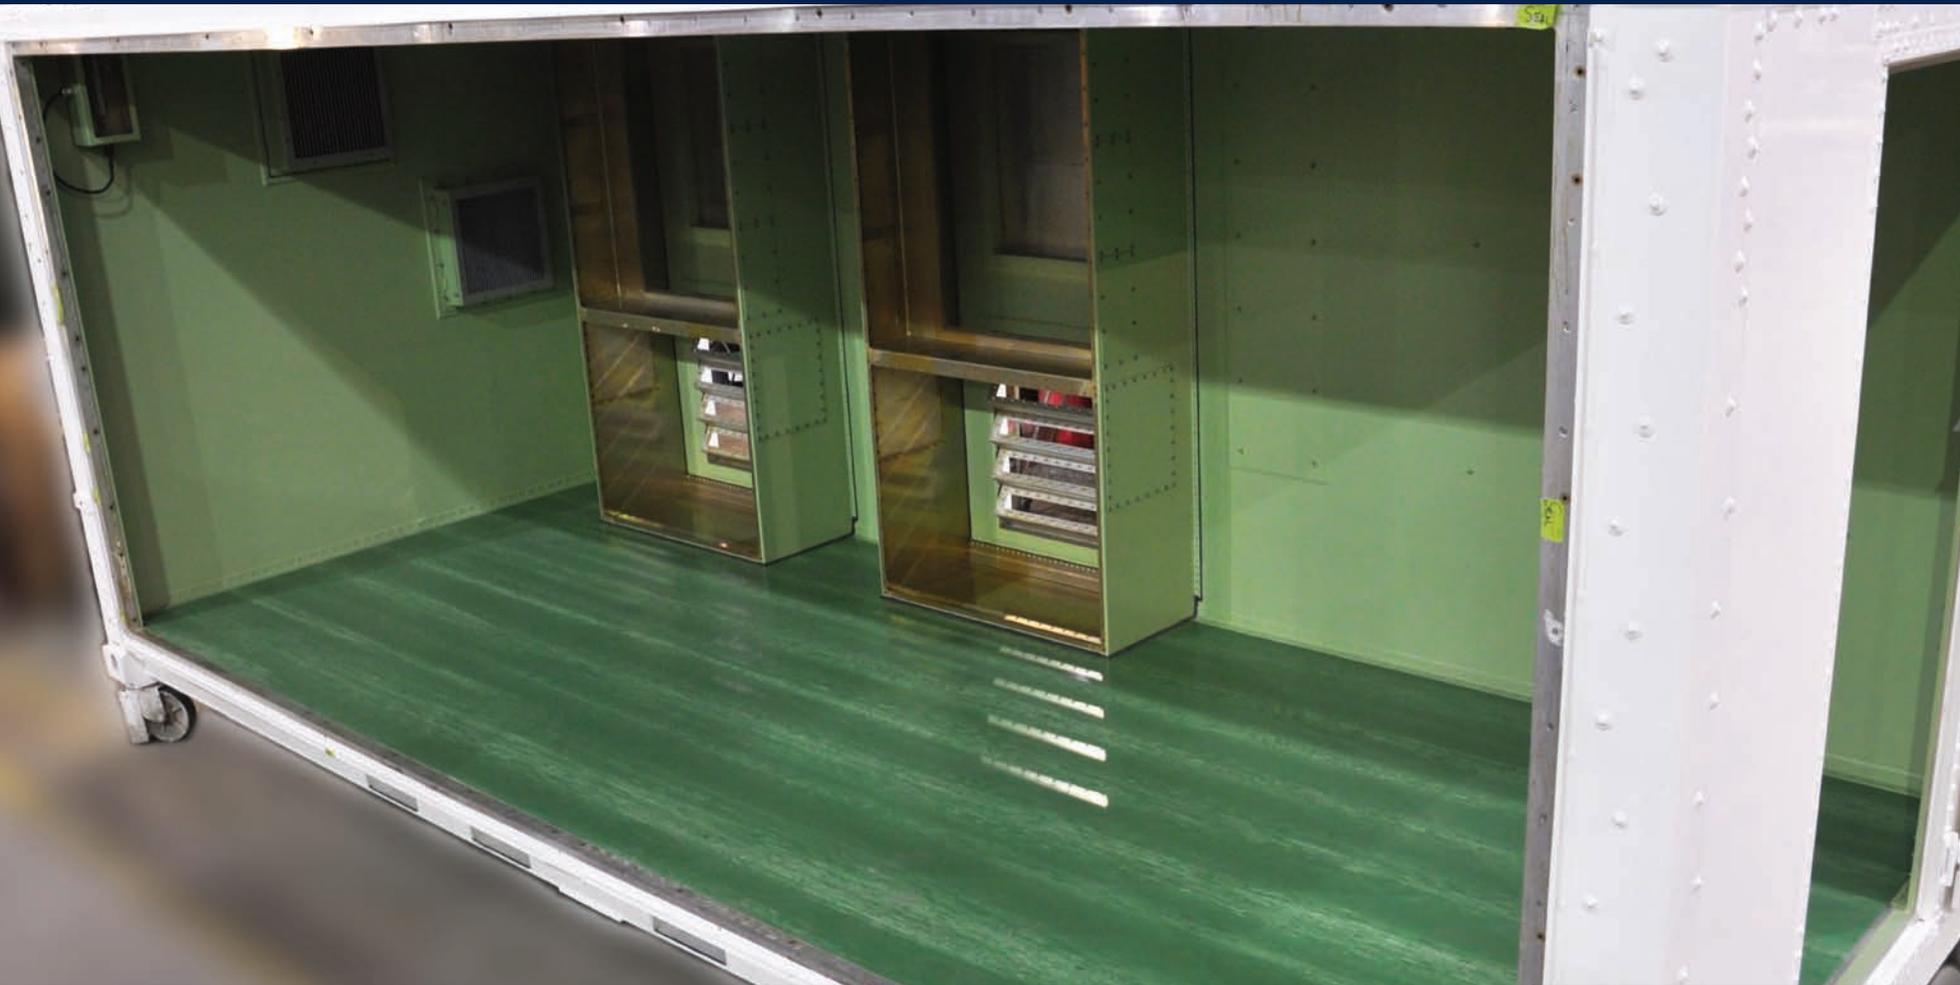

Product #: M05 (3') M05.6 (6')
Color # Name: 5 Blue Marble

Product #: M07UV (3') M07.6 (6')
Color # Name: 7 Gray Marble

Product #: M08 (3') M08.6 (6')
Color # Name: 8 Beige Marble

Product #: M09 (3') M09.6 (6')
Color # Name: 9 Green Marble



LONSEAL, INC.

928 E. 238TH STREET, CARSON, CA, 90745

310.830.7111

WWW.LONSEAL.COM

Printing limitations may not represent the true color of the product. If color match is critical, please call us to request a sample. For the most up-to-date color choices, go to LONSEAL.COM.