



▲ Infusions™ Resilient Partitions in Twine Trails


Transform existing shared spaces into segmented areas with nonporous and easily cleanable wall partitions artfully designed in a variety of patterns and colors.

KEY SELECTION ATTRIBUTES


- Large format, standard 24" x 96" wall panels are easy to install and reconfigure existing layouts to meet social distancing guidelines
- Partitions can be suspended individually or in groups from ceilings or attached to walls
- Panels can be field cut to accommodate the needs of your space
- Get panels fast: 5 colors available to ship in one week (see colors below)
- Unlike other divider or partition materials, PETG provides a long-lasting designer finish
- Panels and installation hardware packaged in one complete kit
- 2 piece minimum order

COLORS/PATTERNS Due to printing limitations, shade may vary from actual product.

FAST1 COLORS – panels to ship in 1 week

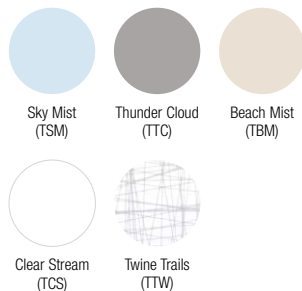

FAST3 COLORS – panels to ship in 3 weeks

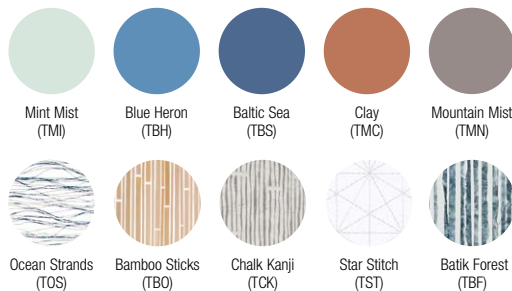

VISUAL SELECTION

| Item No. ♦ | Dimensions (Inches) |
|---------------------------------|-------------------------------------|
| INFUSIONS™ Resilient Partitions | |
| 5845W24L96 _ _ _ | 24 x 96 x 1/4" <input type="text"/> |



Items – See colors/patterns above

FAST details at: armstrongceilings.com/partitions



Items – See colors/patterns above

♦ When specifying or ordering, include the appropriate 3-letter color suffix (e.g., 5845W24L96 I S M.)

PHYSICAL DATA

Material
PETG

Surface Finish
Smooth

Fire Performance
Infusions™ Resilient panels have been tested according to NFPA 286 and are equivalent to Class A Interior Finish as defined by the International Building Code. Contact TechLine at 1 877 276-7876 for specific U.S. and Canadian fire performance data.

Installation and Design Considerations
Do not allow panel edges to get wet. Infusions Resilient panels are not approved for exterior application.

Panel kits include ceiling hanging kit and floor mounting kit hardware. Floor mounting hardware is optional, but recommended. Floor mounting hardware requires field drilling pilot holes in panels.

Linking kits must be ordered separately.

Panels can be damaged by exposure to high temperatures. Panel temperature should not be permitted to exceed 100°F.

CDC Recommended Disinfectants
Products have been evaluated for use with the following CDC-recommended disinfectants: 3% hydrogen Peroxide, Sodium Hypochlorite/Bleach (0.5% Solution), or


Clorox Healthcare® Bleach Germicidal Wipes. Recommended Dwell Time of 10 minutes. More options and details available on armstrongceilings.com

Warranty
Details at armstrongceilings.com

Minimum Order Quantity
2 pieces

Weight; Pieces/ Carton
34 lbs/pc; 2.13 lbs/SF
2 pcs/ctn
32 SF/ctn

INSTALLATION DETAILS (Hardware included with panels)

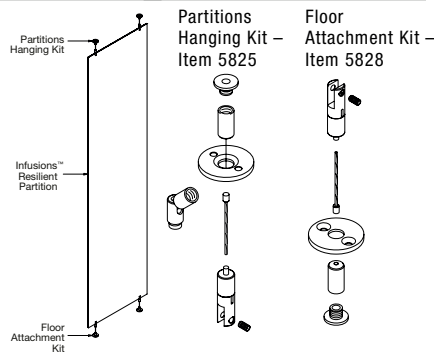

ACCESSORIES (ordered separately)

| Item No. | Description | Color | Pcs/Ctn |
|----------|-------------|--------|----------|
| 5827 | Joining Kit | Silver | 3 Clamps |

WALLS